

NORCA

67235N







	Nome	Model	Modèle	Modell	Modelo	Norca 67235N(T)
	Campo di applicazione	Application field	Champe d'application	Anwendungsbereich	Campo d'aplicación	°C
						+5 ÷ -2
	Alimentazione	Power supply	Alimentation	Netzanschluß	Alimentación	
						400/3/50
	Corrente massima assorbita	Max. absorbed current	Courant absorbé max.	Max. absorbierter Strom	Corriente máx. absorbida	A
						9,2
	Potenza massima assorbita	Max. absorbed power	Puissance max. absorbée	Max. aufgenommene Leistung	Máx. Potencia absorbida	kW
						3,54
	Tipo refrigerante	Refrigerant type	Tipe du gaz	Kältemittel	Tipo refrigerante	
						R455A
	Classe PED	PED Category	Catégorie PED	PED-Klasse	Categoría PED	
						II
	Pressione sonora a 10 m **	Sound pressure level at 10 m **	Pression acoustique à 10 m **	Schalldruck in 10 m **	Presión sonora a 10 m **	dB(A)
						50
CMP	Resa *	Capacity *	Puissance *	Leistung *	Rendimiento *	W
						4405
	Tipo compressore	Compressor type	Type compresseur	Kompressortyp	Tipo compresor	
						E
CND	Passo alette	Fin spacing	Ecart alettes	Lamellenabstand	Paso aletas	mm
						2,5
	Ventilatori	Fan	Ventilateur	Ventilator	Ventiladores	
						2xØ350
	Pot nominale assorbita	Power rating	Puissance nominale	Nennleistung	Potencia nominal	W
						360
	Portata aria	Air volume	Debit d' air	Volumenstrom	Caudal aire	m3/h
						3200
EVP	Passo alette	Fin spacing	Ecart alettes	Lamellenabstand	Paso aletas	mm
						4,2
	Sbrinamento	Defrost	Dégivrage	Abtauung	Descongelación	
						G
	Espansione	Expansion	Expansion	Expansion	Expansión	
						VT
	Ventilatori	Fan	Ventilateur	Ventilator	Ventiladores	
						2xØ350
	Pot nominale assorbita	Nom. power cons.	Puiss. nom. absorbée	Nennleistungsaufnahme	Pot. Nominal absorbida	W
						330
	Portata aria	Air volume	Debit d' air	Volumenstrom	Caudal aire	m3/h
						4200
	Freccia d'aria	Air throw	Projection d'air	Reichweite	Flecha de aire	
						10
	Imballo X	Packing X	Emballage X	Verpackung X	Embalajes X	mm
						1120
	Imballo Y	Packing Y	Emballage Y	Verpackung Y	Embalajes Y	mm
						1240
	Imballo Z	Packing Z	Emballage Z	Verpackung Z	Embalajes Z	mm
						1125
	Peso lordo	Gross weight	Poids brut	Bruttogewicht	Peso bruto	kg
						-
	Peso netto	Net Weight	Poids net	Nettogewicht	Peso neto	kg
						-
	Volume	Volume	Volume	Volumen	Volúmen	m3
						1,56
	Codice	Code	Code	Kodex	Código	
						99909750

N= * :Te= -10°C ; Tcond= + 40°C
B= * : Te= -30°C / Tcond= +40°C
** Dati derivanti da correlazioni empiriche

 **R455A** : Fluido refrigerante infiammabile, Flammable refrigeration fluid, Fluide frigogène inflammable, Entflammbar Kältemittel, Fluido frigorígeno inflamable
CMP : Compressore / Compressor / Compresseur / Kompressorleistung / Compresor
CND : Condensatore / Condenser / Condenseur / Verflüssiger / Condensador
EVP : Evaporatore / Evaporateur / Evaporateur / Verdampfer / Evaporador
E : Ermetico / Hermetic / Hermetique / Vollhermetisch / Hermético
G : Gas caldo / Hot gas / Gaz chaud / Heissgas / Gas caliente
P : Potenza frigorifera / Cooling capacity / Puissances frigorifiques / Kälteleistung / Potencia frigorífica
S : Semihermetico / Semihermetic / Semi-hermetique / Halbhermetisch / Semihermético
Ta : Temperatura ambiente / Ambient temperature / Température ambiente / Umgebungstemperatur / Temperatura ambiente
Tc : Temperatura cella / Cold room temperature / Température chambre froid / Kühlraumtemperatur / Temperatura cámara
Te : Temperatura evaporazione / evaporation temperature / température d'évaporation / Verdampfungstemperatur / temperatura de evaporación
Tcond : Temperatura condensazione / condensation temperature / température de condensation / Kondensationstemperatur / temperatura de condensación
Vol : Volume cella / Coldroom volume / Volume chambre / Kühlzellenvolumen / Volúmen cámara
VT : Valvola termostatica / Expansion valve / Détendeur thermostatique / Thermostatisches Expansionsventil Válvula termostática

NORCA

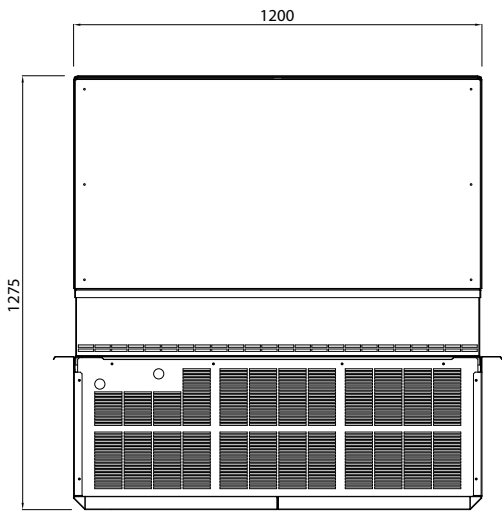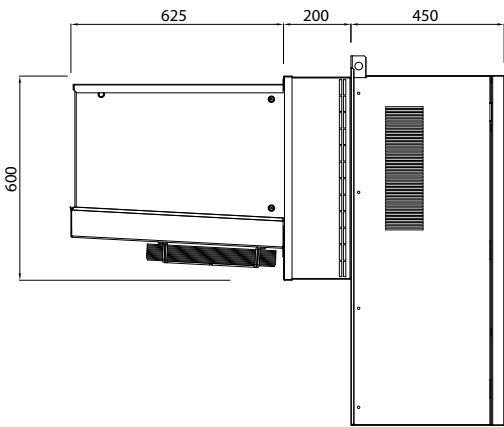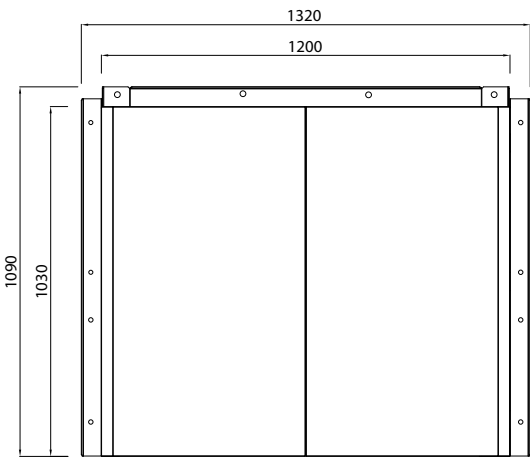

Disegno tecnico indicativo. Le misure reali potrebbero subire delle variazioni. Indicative technical drawing. Actual measurements may vary.

RESA / VOLUME - CAPACITY / VOLUME - PUISSANCE/ VOLUME - LEISTUNG/ VOLUMEN - RENDIMIENTO/ VOLUMEN

Vol. A = Isolamento cella: Tutte le superfici - Cell isolation: All the surface - Isolation de la chambre froid: Toute la surface - Zellisolierung: Alle Oberfläche
Aislamiento celular: Todas la superficie

Vol. B = Isolamento cella: Tutte le pareti tranne il pavimento* - Cell isolation: All the walls except the floor* - Isolation de la chambre froid: Tous les murs sauf le sol*
Zellisolierung: Alle Wände außer dem Boden* - Aislamiento celular: Todas las paredes excepto el piso*

Volume calculation conditions: pag. 297

Norca 67235N(T)	Tc	°C	-2				0				5			
	Ta	°C	27	32	38	43	27	32	38	43	27	32	38	43
	Pf	W	5141	4695	4244	3766	5544	5078	4604	4107	6492	5983	5455	4914
	Vol A	m3	65,5	55	44,0	34,5	79,0	66,0	53,0	41,5	126,5	106	84,5	66,5
	Vol B	m3	51,0	43	35,0	28,0	61,0	52,0	42,5	34,0	97,0	83	67,5	54,5

! Temperatura ambiente / Ambient temperature / Température ambiante / Umgebungstemperatur / Temperatura ambiente : **Min+ 16°C - Max +43°C**