

NORCA



67225N



Nome	Model	Modèle	Modell	Modelo	Norca 67235N(T) 60HZ	
Campo di applicazione	Application field	Champe d'application	Anwendungsbereich	Campo d'aplicación	°C	+5 ÷ -2
Alimentazione	Power supply	Alimentation	Netzanschluß	Alimentación		400/3/60
Corrente massima assorbita	Max. absorbed current	Courant absorbé max.	Max. absorbierter Strom	Corriente máx. absorbida	A	9,2
Potenza massima assorbita	Max. absorbed power	Puissance max. absorbée	Max. aufgenommene Leistung	Máx. Potencia absorbida	kW	4,12
Tipo refrigerante	Refrigerant type	Tipe du gaz	Kältemittel	Tipo refrigerante		R455A
Classe PED	PED Category	Catégorie PED	PED-Klasse	Categoría PED		II
Pressione sonora a 10 m **	Sound pressure level at 10 m **	Pression acoustique à 10 m **	Schalldruck in 10 m **	Presión sonora a 10 m **	dB(A)	50
CMP	Resa *	Capacity *	Leistung *	Rendimiento *	W	4862
	Tipo compressore	Compressor type	Kompressortyp	Tipo compresor		E
CND	Passo alette	Fin spacing	Lamellenabstand	Paso aletas	mm	2,5
	Ventilatori	Fan	Ventilator	Ventiladores		2xØ350
	Pot nominale assorbita	Power rating	Nennleistung	Potencia nominal	W	360
	Portata aria	Air volume	Volumenstrom	Caudal aire	m3/h	3200
EVP	Passo alette	Fin spacing	Lamellenabstand	Paso aletas	mm	4,2
	Sbrinamento	Defrost	Abtauung	Descongelación		G
	Espansione	Expansion	Expansion	Expansión		VT
	Ventilatori	Fan	Ventilator	Ventiladores		2xØ350
	Pot nominale assorbita	Nom. power cons.	Nennleistungsaufnahme	Pot. Nominal absorbida	W	330
	Portata aria	Air volume	Volumenstrom	Caudal aire	m3/h	4200
	Freccia d'aria	Air throw	Reichweite	Flecha de aire		10
	Imballo X	Packing X	Verpackung X	Embalajes X	mm	-
	Imballo Y	Packing Y	Verpackung Y	Embalajes Y	mm	-
	Imballo Z	Packing Z	Verpackung Z	Embalajes Z	mm	-
	Peso lordo	Gross weight	Bruttogewicht	Peso bruto	kg	-
	Peso netto	Net Weight	Nettogewicht	Peso neto	kg	-
	Volume	Volume	Volumen	Volúmen	m3	-
	Codice	Code	Kodex	Código		NORCA_60HZ_09

N= * :Te= -10°C ; Tcond= + 40°C
B= * : Te= -30°C / Tcond= +40°C
** Dati derivanti da correlazioni empiriche

- 

R455A : Fluido refrigerante infiammabile, Flammable refrigeration fluid, Fluide frigogène inflammable, Entflammbar Kältemittel, Fluido frigorígeno inflamable

CMP : Compressore / Compressor / Compresseur / Kompressorleistung / Compresor

CND : Condensatore / Condenser / Condenseur / Verflüssiger / Condensador

EVP : Evaporatore / Evaporateur / Evaporateur / Verdampfer / Evaporador

E : Ermetico / Hermetic / Hermétique / Vollhermetisch / Hermético

G : Gas caldo / Hot gas / Gaz chaud / Heissgas / Gas caliente

P : Potenza frigorifera / Cooling capacity / Puissances frigorifiques / Kälteleistung / Potencia frigorífica

S : Semihermetico / Semihermetic / Semi-hermetique / Halbhermetisch / Semihermético

Ta : Temperatura ambiente / Ambient temperature / Température ambiente / Umgebungstemperatur / Temperatura ambiente

Tc : Temperatura cella / Cold room temperature / Température chambre froid / Kühlraumtemperatur / Temperatura cámara


Te : Temperatura evaporazione / evaporation temperature / température d'évaporation / Verdampfungstemperatur / temperatura de evaporación

Tcond : Temperatura condensazione / condensation temperature / température de condensation / Kondensationstemperatur / temperatura de condensación

Vol : Volume cella / Coldroom volume / Volume chambre / Kühlzellenvolumen / Volúmen cámara

VT : Valvola termostatica / Expansion valve / Détendeur thermostatique / Thermostatisches Expansionsventil Válvula termostática

NORCA

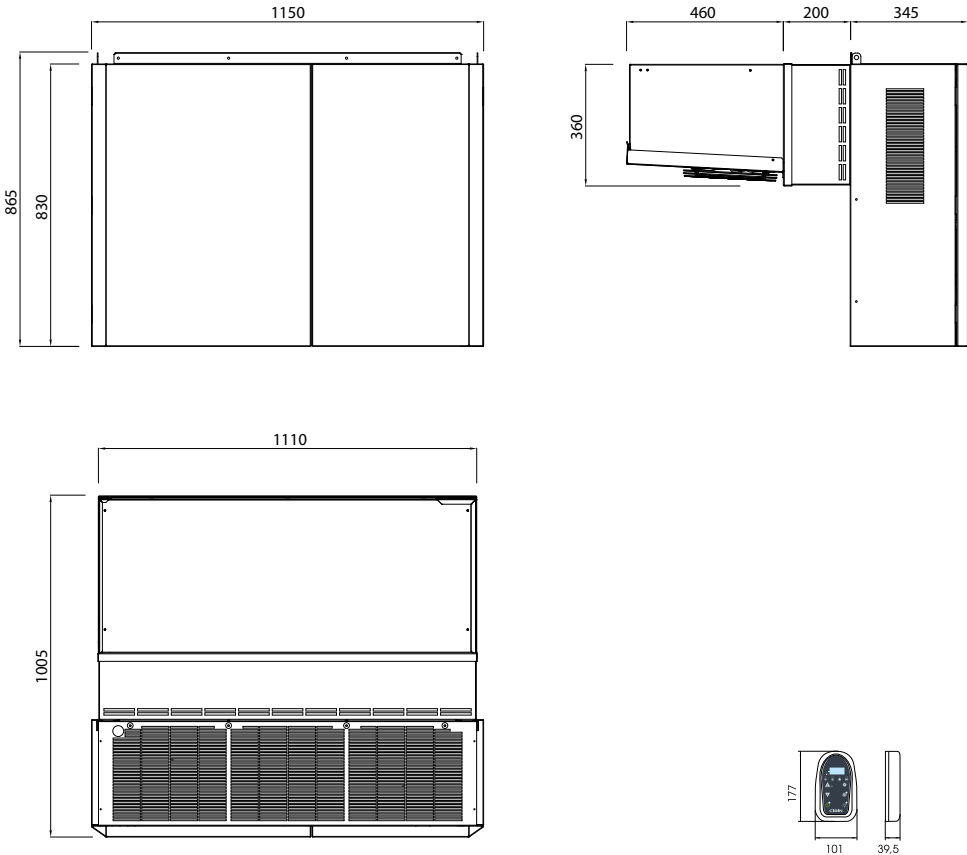

Disegno tecnico indicativo. Le misure reali potrebbero subire delle variazioni. Indicative technical drawing. Actual measurements may vary.

RESA / VOLUME - CAPACITY / VOLUME - PUISSANCE/ VOLUME - LEISTUNG/ VOLUMEN - RENDIMIENTO/ VOLUMEN

Vol. A = Isolamento cella: Tutte le superfici - Cell isolation: All the surface - Isolation de la chambre froid: Toute la surface - Zellisolierung: Alle Oberfläche
Aislamiento celular: Todas la superficie
Vol. B = Isolamento cella: Tutte le pareti tranne il pavimento* - Cell isolation: All the walls except the floor* - Isolation de la chambre froid: Tous les murs sauf le sol*
Zellisolierung: Alle Wände außer dem Boden* - Aislamiento celular: Todas las paredes excepto el piso*

Volume calculation conditions: pag. 297

Norca 67235N(T) 60HZ	Tc	°C	-2				0				5			
	Ta	°C	27	32	38	43	27	32	38	43	27	32	38	43
	Pf	W	5343	4976	4514	4109	5735	5351	4868	4445	6702	6276	5739	5270
	Vol A	m3	65,0	55,8	45,1	36,5	77,7	66,8	54,1	43,9	124,0	106,3	85,8	69,6
	Vol B	m3	52,9	45,9	37,7	30,9	63,1	54,8	45,1	37,1	100,4	87,1	71,5	58,9

! Temperatura ambiente / Ambient temperature / Température ambiante / Umgebungstemperatur / Temperatura ambiente : **Min+ 16°C - Max +43°C**