

ICEBERG

260245SN G1

	Nome	Model	Modèle	Modell	Modelo	ICEBERG 260245SN G1
	Campo di applicazione	Application field	Champe d'application	Anwendungsbereich	Campo d'applicación	°C +5 ÷ -2
	Alimentazione	Power supply	Alimentation	Netzanschluß	Alimentación	400/3/50
	Corrente massima assorbita	Max. absorbed current	Courant absorbé max.	Max. absorbierter Strom	Corriente máx. absorbida	A 22,9
	Potenza massima assorbita	Max. absorbed power	Puissance max. absorbée	Max. aufgenom. Leistung	Máx. Potencia absorbida	kW 10,4
	Tipo refrigerante	Refrigerant type	Tipe du gaz	Kältemittel	Tipo refrigerante	R455A
	Classe PED	PED Category	Catégorie PED	PED-Klasse	Categoría PED	II
	Pressione sonora a 10 m **	Sound pressure level at 10 m **	Pression acoustique à 10 m **	Schalldruck in 10 m **	Presión sonora a 10 m **	dB(A) 55
CMP	Resa *	Capacity *	Puissance *	Leistung *	Rendimiento *	W 11694
	Tipo compressore	Compressor type	Type compresseur	Kompressortyp	Tipo compresor	S
CND	Passo alette	Fin spacing	Ecart alettes	Lamellenabstand	Paso aletas	mm 2,5
	Ventilatori	Fan	Ventilateur	Ventilator	Ventiladores	2x Ø450 EC
	Pot nominale assorbita	Power rating	Puissance nominale	Nennleistung	Potencia nominal	W 690
	Portata aria	Air volume	Debit d' air	Volumenstrom	Caudal aire	m3/h 7800
EVP	Passo alette	Fin spacing	Ecart alettes	Lamellenabstand	Paso aletas	mm 6
	Sbrinamento	Defrost	Dégivrage	Abtauung	Descongelación	EL
	Espansione	Expansion	Expansion	Expansion	Expansión	VE
	Ventilatori	Fan	Ventilateur	Ventilator	Ventiladores	2x Ø450 EC
	Pot nominale assorbita	Nom. power cons.	Puiss. nom. absorbée	Nennleistungsaufnahme	Pot. Nominal absorbida	W 960
	Portata aria	Air volume	Debit d' air	Volumenstrom	Caudal aire	m3/h 9800
	Freccia d'aria	Air throw	Projection d'air	Reichweite	Flecha de aire	m 25
	Imballo UC X	Packing UC X	Emballage UC X	Verpackung UC X	Embalajes UC X	mm 2000
	Imballo UC Y	Packing UC Y	Emballage UC Y	Verpackung UC Y	Embalajes UC Y	mm 1140
	Imballo UC Z	Packing UC Z	Emballage UC Z	Verpackung UC Z	Embalajes UC Z	mm 1050
	Imballo UE X	Packing UE X	Emballage UE X	Verpackung UE X	Embalajes UE X	mm 2160
	Imballo UE Y	Packing UE Y	Emballage UE Y	Verpackung UE Y	Embalajes UE Y	mm 995
	Imballo UE Z	Packing UE Z	Emballage UE Z	Verpackung UE Z	Embalajes UE Z	mm 995
	Peso lordo	Gross weight	Poids brut	Bruttogewicht	Peso bruto	kg A215 / B179
	Peso netto	Net Weight	Poids net	Nettogewicht	Peso neto	kg A165 / B93
	Volume	Volume	Volume	Volumen	Volúmen	m3 A2,39 / B2,14
	Codice	Code	Code	Kodex	Codigo	999909868

N= * :Te= -10°C ; Tcond= +40°C
B= * : Te= -30°C / Tcond= +40°C
** Dati derivanti da correlazioni empiriche




R455A R455A is a flammable refrigerant. Refer to EN 378-1 for charge limits

- CMP : Compressore / Compressor / Compresseur / Kompressorleistung / Compresor
- CND : Condensatore / Condenser / Condenseur / Verflüssiger / Condensador
- EVP : Evaporatore / Evaporateur / Evaporateur / Verdampfer / Evaporador
- E : Ermetico / Hermetic / Hermetique / Vollhermetisch / Hermético
- EC : Ventilatore elettronico / Electronic fan / Ventilateur électronique / Elektronischer Ventilator / Ventilador electrónico
- P : Potenza frigorifera / Cooling capacity / Puissances frigorifiques / Kälteleistung Potencia frigorífica
- S : Semiermetico / Semihermetic / Semi-hermetique / Halbhermetisch / Semihermético
- Ta : Temperatura ambiente / Ambient temperature / Température ambiente Umgebungstemperatur / Temperatura ambiente

- Tc : Temperatura cella / Cold room temperature / Température chambre froid Kühlraumtemperatur / Temperatura cámara
- Te : Temperatura evaporazione / evaporation temperature / température d'évaporation Verdampfungstemperatur / temperatura de evaporación
- Tcond : Temperatura condensazione / condensation temperature / température de condensation Kondensationstemperatur / temperatura de condensación
- Vol : Volume cella / Coldroom volume / Volume chambre / Kühlzellenvolumen Volúmen cámara
- VE : Valvola elettronica / Electronic valve / Valve électronique / Elektronisches Ventil / Válvula electrónica

ICEBERG

Versione Professional
Professional version
Professionnel
Beruflich
Profesional

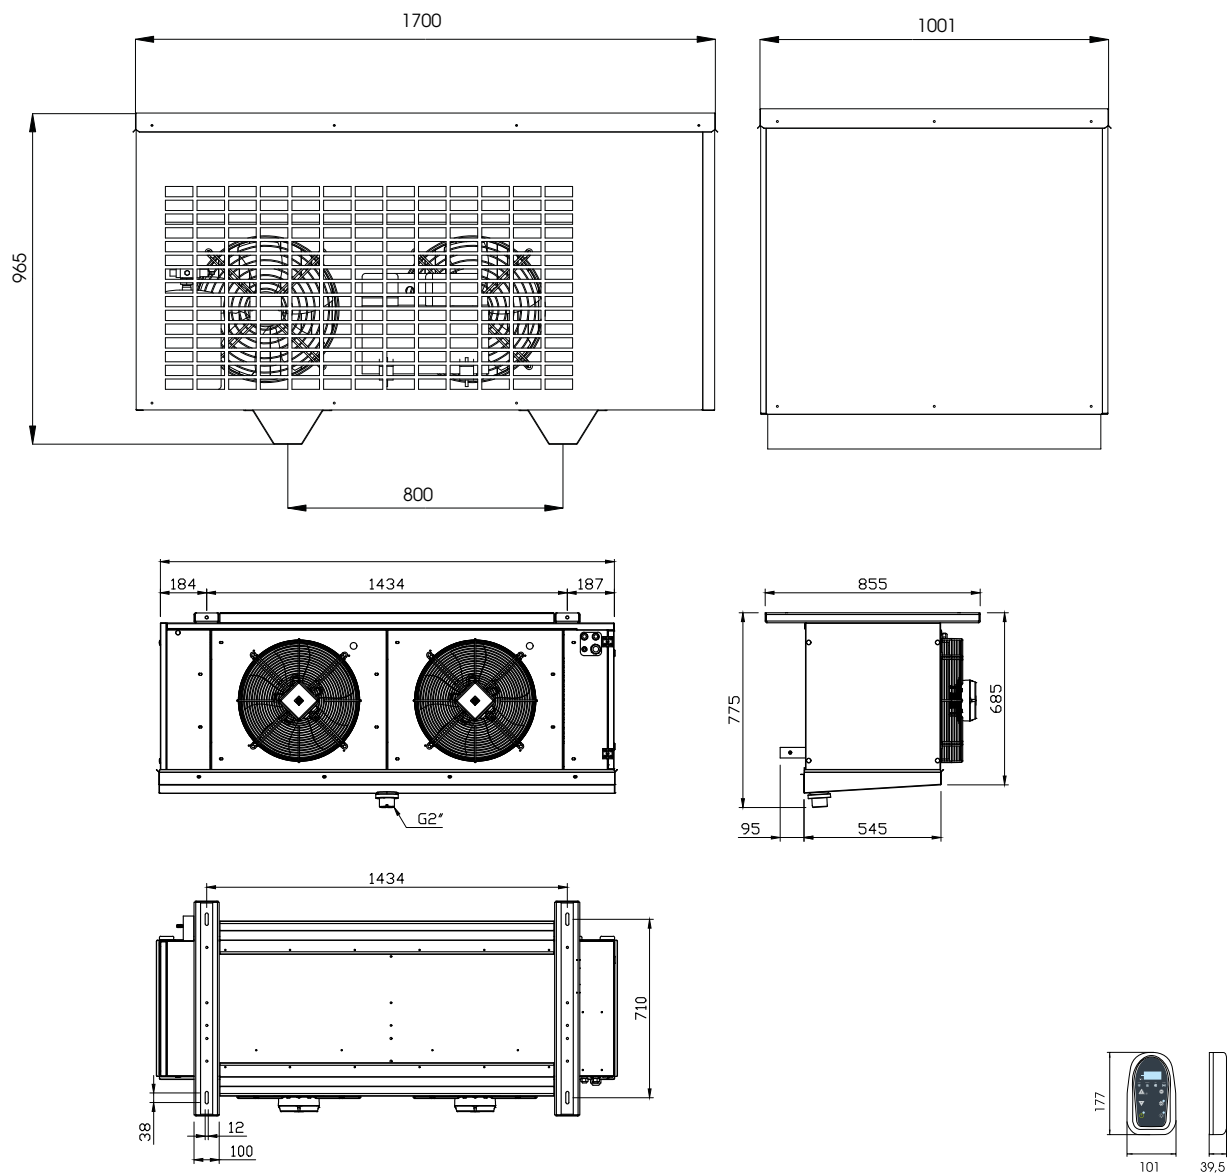

RESA / VOLUME - CAPACITY / VOLUME - PUISSANCE/ VOLUME - LEISTUNG/ VOLUMEN - RENDIMIENTO/ VOLUMEN
Volume calculation conditions: pag. 67

ICEBERG 260245SN G1	Tc	°C	-2				0				5			
	Ta	°C	27	32	38	43	27	32	38	43	27	32	38	43
	Pf	W	13118	12243	11144	10185	13920	12989	11820	10800	15870	14799	13456	12283
	Vol	m3	140,6	125,0	106,1	90,4	165,0	146,5	124,1	105,5	253,7	223,8	188,0	158,6

Max temperatura ambiente: +43°C / Max ambient temperature: +43°C / Température ambiante maximale: + 43°C / Max Umgebungstemperatur: +43°C / Temperatura ambiente maxima: +43°C

Disegno tecnico indicativo. Le misure reali potrebbero subire delle variazioni. Indicative technical drawing. Actual measurements may vary.