

ICEBERG

07125N09125N

Modello	Model	Modèle	Modell	Modelo	ICEBERG 07125N 230-1-50		ICEBERG 09125N 230-1-50	
Campo applicazione	Application field	Champé d'application	Anwendungsbereich	Campo d'aplicación		+5 ÷ -2		+5 ÷ -2
Alimentazione	Power supply	Alimentation	Netzanschluß	Alimentación	V/ph/ Hz	230/1+N/50		230/1+N/50
Corrente massima assorbita	Maximum absorbed current	Courant absorbé maximum	Maximal absorbierter Strom	Corriente máxima absorbida	A	7,4		7,8
Potenza massima assorbita	Maximum absorbed power	Puissance maximale absorbée	Maximal aufgenommene Leistung	Máxima potencia absorbida	kW	1,2		1,4
Tipo refrigerante	Refrigerant type	Tipe du gaz	Kältemittel	Tipo refrigerante		R404A/R507/ R452A/R448A/ R449A		R404A/R507/ R452A/R448A/ R449A
Resa*	Capacity*	Puissance*	Leistung*	Rendimiento*	W	1204		1448
Pressione sonora a 10 m**	Sound pressure level at 10 m**	Pression acoustique à 10 m**	Schalldruck in 10 m**	Presión sonora a 10 m**	dB(A)	52		52
Potenza nominale	Power rating	Puissance nominale	Nennleistung	Potencia nominal	CV	0,75		1
CMP	Tipo compressore	Compressor type	Type compresseur	Kompressortyp	Tipo compresor		E	E
	Passo alette	Fin spacing	Escart alettes	Lamellenabstand	Paso aletas	mm	2,5	2,5
CND	Ventilatori	Fans	Ventilateurs	Ventilatoren	Ventiladores	ø mm	1 x ø254	1 x ø254
	Potenza nominale assorbita	Nominal power consumption	Puissance nominal absorbée	Nennleistungsaufnahme	Potencia nominal absorbida	W	95	95
	Portata d'aria	Air volume	Débit d'air	Volumenstrom	Caudal aire	m³/h	700	700
	Passo alette	Fin spacing	Escart alettes	Lamellenabstand	Paso aletas	mm	6	6
	Sbrinamento	Defrosting	Dégivrage	Abtauung	Desescarche		EL	EL
	Espansione	Expansion	Expansion	Expansion	Expansión		VT	VT
EVP	Ventilatori	Fans	Ventilateurs	Ventilatoren	Ventiladores	ø mm	2 x ø254	2 x ø254
	Potenza nominale assorbita	Nominal power consumption	Puissance nominal absorbée	Nennleistungsaufnahme	Potencia nominal absorbida	W	146	146
	Portata d'aria	Air volume	Débit d'air	Volumenstrom	Caudal aire	m³/h	1300	1300
	Freccia d'aria	Air throw	Projection d'air	Reichweite	Flecha de aire	m	9	9
	Imballo	Packaging	imballo	Imballo	Imballo	X mm	1250	1250
A						Y mm	600	600
						Z mm	865	865
						X mm	-	-
B						Y mm	-	-
						Z mm	-	-
	Peso lordo	Gross weight	Poids brut	Bruttogewicht	Peso bruto	kg	80	82
	Peso netto	Net weight	Poids net	Nettogewicht	Peso neto	kg	61	63
	Volume	Volume	Volume	Volumen	Volúmen	m³	0,65	0,65
	Codice	Code	Code	Kodex	Codigo		999908004	999908005

*Resa:Te= -10°C ; Tcond= + 40°C

** Dati derivanti da correlazioni empiriche

C : Capillare / Capillary / Capillaire / Kapillar / Capilar

CMP : Compressore / Compressor / Compresseur / Kompressorleistung / Compresor

CND : Condensatore / Condenser / Condenseur / Verflüssiger / Condensador

EVP : Evaporatore / Evaporateur / Evaporateur / Verdampfer / Evaporador

E : Ermetico / Hermetic / Hermetique / Vollhermetisch / Hermético

G : Gas caldo / Hot gas / Gaz chaud / Heissgas / Gas caliente

P : Potenza frigorifera / Cooling capacity / Puissances frigorifiques / Kälteleistung / Potencia frigorífica

S : Semiermetico / Semihermetic / Semi-hermetique / Halbhermetisch / Semihermético

Ta : Temperatura ambiente / Ambient temperature / Température ambiente / Umgebungstemperatur / Temperatura ambiente

Tc : Temperatura cella / Cold room temperature / Température chambre froid / Kühlraumtemperatur / Temperatura cámara

Te : Temperatura evaporazione / evaporation temperature / température d'évaporation / Verdampfungstemperatur / temperatura de evaporación


Tcond : Temperatura condensazione / condensation temperature / température de condensation / Kondensationstemperatur / temperatura de condensación

Vol : Volume cella / Coldroom volume / Volume chambre / Kühlzellenvolumen / Volúmen cámara

VT : Valvola termostatica / Expansion valve / Détendeur thermostatique / Thermostatisches Expansionsventil Válvula termostática

ICEBERG

Versione Professional
Professional version
Professionnel
Beruflich
Profesional

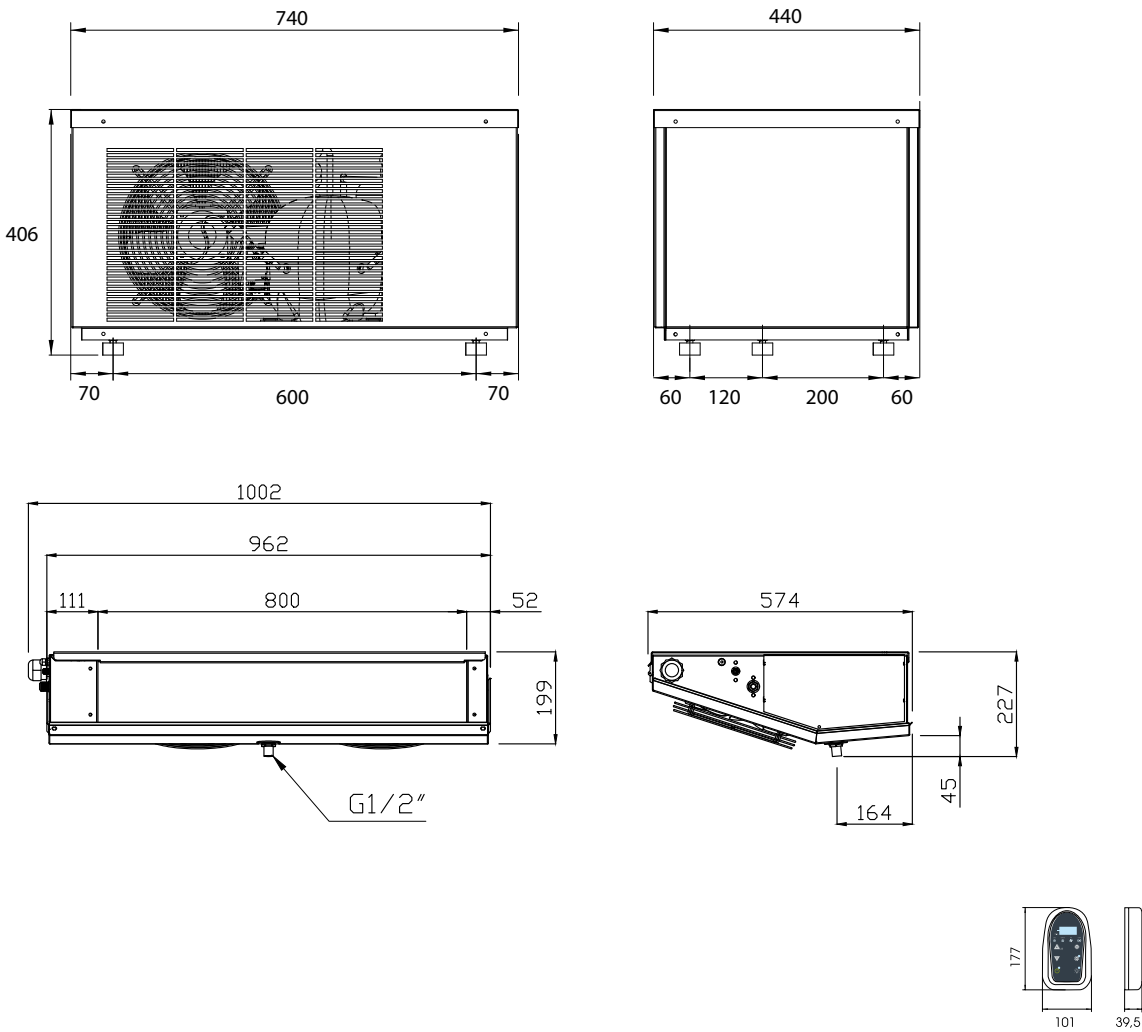

RESA / VOLUME - CAPACITY / VOLUME - PUISSANCE/ VOLUME - LEISTUNG/ VOLUMEN - RENDIMENTO/ VOLUMEN
Volume calculation conditions: pag. 149

07125 N	Tc	°C	-2				0			
	Ta	°C	27	32	38	43	27	32	38	43
	P	W	1323	1235	1144	1086	1400	1337	1250	1204
	Vol	m3	9,21	7,37	5,59	4,44	11,36	9,35	7,15	5,80

09125 N	Tc	°C	-2				0			
	Ta	°C	27	32	38	43	27	32	38	43
	P	W	1465	1372	1276	1159	1566	1490	1413	1311
	Vol	m3	10,75	8,66	6,63	4,94	13,44	11,03	8,66	6,64

Disegno tecnico indicativo. Le misure reali potrebbero subire delle variazioni. Indicative technical drawing. Actual measurements may vary.