

ICEBERG

19325N 24325N

	Modello	Model	Modèle	Modell	Modelo		ICEBERG 15225N-04 230- 1-50+N+PE	ICEBERG 19325N 400-3-50
	Campo applicazione	Application field	Champé d'application	Anwendungsbereich	Campo d'aplicación		+5 ÷ -2	+5 ÷ -2
	Alimentazione	Power supply	Alimentation	Netzanschluß	Alimentación	V/ph/ Hz	230/1+N/50	400/3+N/50
	Corrente massima assorbita	Maximum absorbed current	Courant absorbé maximum	Maximal absorbierter Strom	Corriente máxima absorbida	A	13,4	6,7
	Potenza massima assorbita	Maximum absorbed power	Puissance maximale absorbée	Maximal aufgenommene Leistung	Máxima potencia absorbida	kW	2,7	3,1
	Tipo refrigerante	Refrigerant type	Tipe du gaz	Kältemittel	Tipo refrigerante		R404A/R507/ R452A/R448A/ R449A	R404A/R507/ R452A/R448A/ R449A
	Resa*	Capacity*	Puissance*	Leistung*	Rendimiento*	W	2716	2767
	Pressione sonora a 10 m**	Sound pressure level at 10 m**	Pression acoustique à 10 m**	Schalldruck in 10 m**	Presión sonora a 10 m**	dB(A)	55	57
	Potenza nominale	Power rating	Puissance nominale	Nennleistung	Potencia nominal	CV	1,5	1,8
CMP	Tipo compressore	Compressor type	Type compresseur	Kompressortyp	Tipo compresor		E	E
	Passo alette	Fin spacing	Escart alettes	Lamellenabstand	Paso aletas	mm	2,5	2,5
CND	Ventilatori	Fans	Ventilateurs	Ventilatoren	Ventiladores	ø mm	2 x ø254	3 x ø254
	Potenza nominale assorbita	Nominal power consumption	Puissance nominal absorbée	Nennleistungsaufnahme	Potencia nominal absorbida	W	190	285
	Portata d'aria	Air volume	Débit d'air	Volumenstrom	Caudal aire	m³/h	1400	2100
	Passo alette	Fin spacing	Escart alettes	Lamellenabstand	Paso aletas	mm	6	6
	Sbrinamento	Defrosting	Dégivrage	Abtauung	Desescarche		EL	EL
	Espansione	Expansion	Expansion	Expansion	Expansión		VT	VT
EVP	Ventilatori	Fans	Ventilateurs	Ventilatoren	Ventiladores	ø mm	3 x ø254	3 x ø250
	Potenza nominale assorbita	Nominal power consumption	Puissance nominal absorbée	Nennleistungsaufnahme	Potencia nominal absorbida	W	219	285
	Portata d'aria	Air volume	Débit d'air	Volumenstrom	Caudal aire	m³/h	1950	2540
	Freccia d'aria	Air throw	Projection d'air	Reichweite	Flecha de aire	m	11	12
	Imballo	Packaging	imballo	Imballo	Imballo	X mm	1460	1525
A						Y mm	630	715
						Z mm	901	785
						X mm	-	2060
B						Y mm	-	720
						Z mm	-	680
	Peso lordo	Gross weight	Poids brut	Bruttogewicht	Peso bruto	kg	121	170
	Peso netto	Net weight	Poids net	Nettogewicht	Peso neto	kg	95	144
	Volume	Volume	Volume	Volumen	Volúmen	m³	0,83	A:0.86 / B:0.97
	Codice	Code	Code	Kodex	Codigo		999908170	999908011


*Resa:Te= -10°C ; Tcond= + 40°C

** Dati derivanti da correlazioni empiriche

- C : Capillare / Capillary / Capillaire / Kapillar / Capilar
- CMP : Compressore / Compressor / Compresseur / Kompressorleistung / Compresor
- CND : Condensatore / Condenser / Condenseur / Verflüssiger / Condensador
- EVP : Evaporatore / Evaporateur / Evaporateur / Verdampfer / Evaporador
- E : Ermetico / Hermetic / Hermetique / Vollhermetisch / Hermético
- G : Gas caldo / Hot gas / Gaz chaud / Heissgas / Gas caliente
- P : Potenza frigorifera / Cooling capacity / Puissances frigorifiques / Kälteleistung / Potencia frigorífica
- S : Semiermetico / Semihermetic / Semi-hermetique / Halbhermetisch / Semihermético
- Ta : Temperatura ambiente / Ambient temperature / Température ambiente / Umgebungstemperatur / Temperatura ambiente
- Tc : Temperatura cella / Cold room temperature / Température chambre froid / Kühlraumtemperatur / Temperatura cámara
- Te : Temperatura evaporazione / evaporation temperature / température d'évaporation / Verdampfungstemperatur / temperatura de evaporación
- Tcond : Temperatura condensazione / condensation temperature / température de condensation / Kondensationstemperatur / temperatura de condensación
- Vol : Volume cella / Coldroom volume / Volume chambre / Kühlzellenvolumen / Volúmen cámara
- VT : Valvola termostatica / Expansion valve / Détendeur thermostatique / Thermostatisches Expansionsventil Válvula termostática

ICEBERG

Versione Professional
Professional version
Professionnel
Beruflich
Profesional

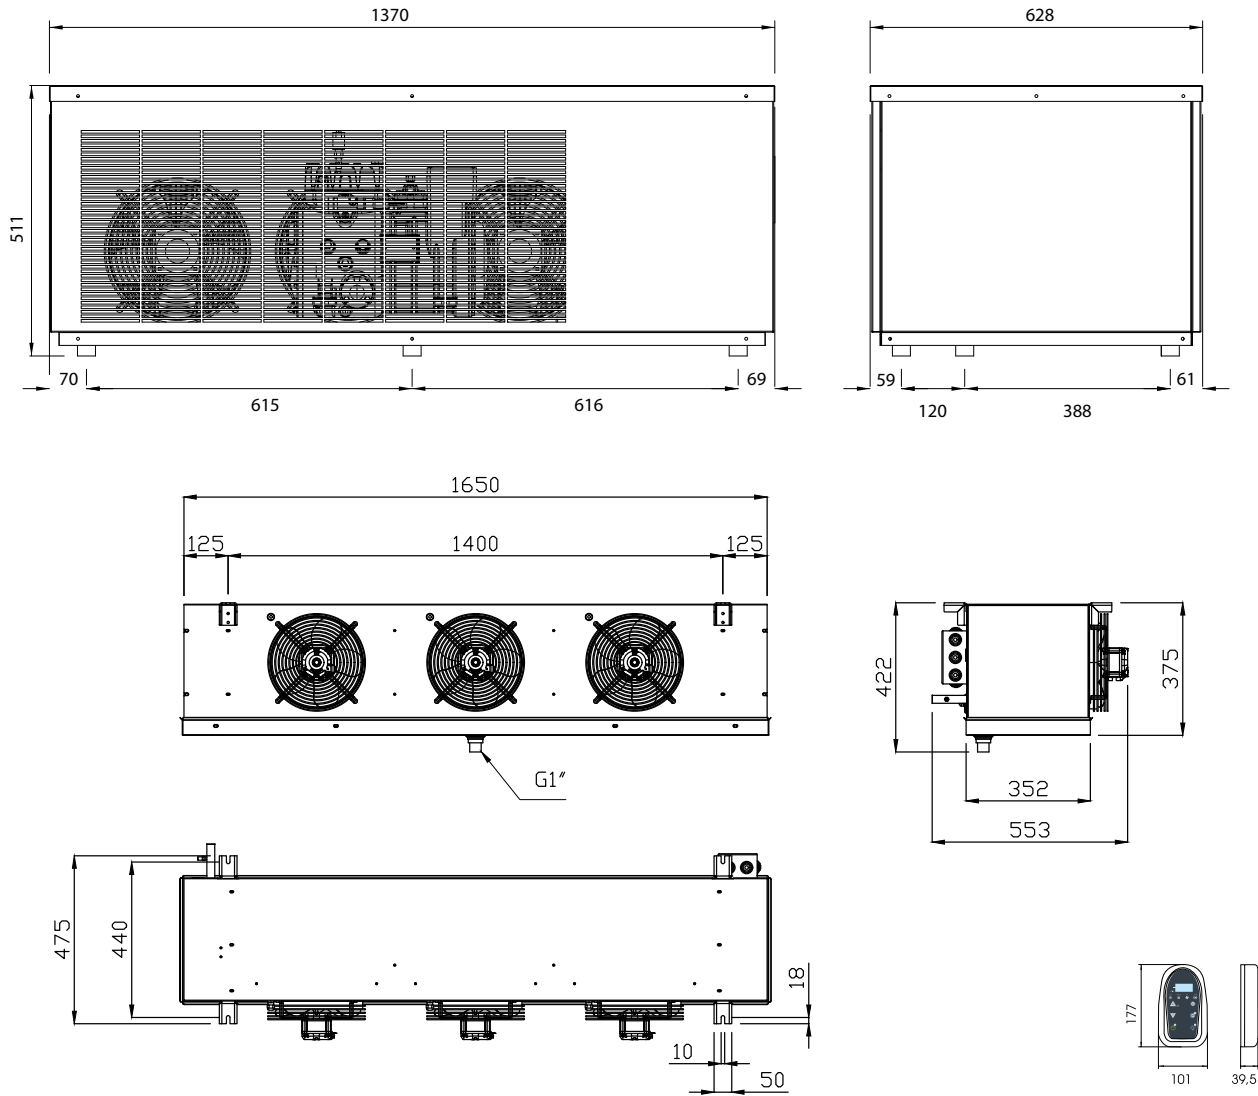

RESA / VOLUME - CAPACITY / VOLUME - PUISSANCE/ VOLUME - LEISTUNG/ VOLUMEN - RENDIMENTO/ VOLUMEN
Volume calculation conditions: pag. 149

19325 N	Tc	°C	-2				0			
	Ta	°C	27	32	38	43	27	32	38	43
	P	W	3140	2863	2537	2241	3326	3034	2692	2441
	Vol	m3	32,77	25,96	19,00	13,89	40,16	31,69	23,10	17,49

24325 N	Tc	°C	-2				0			
	Ta	°C	27	32	38	43	27	32	38	43
	P	W	3604	3307	2890	2669	3814	3503	3168	2833
	Vol	m3	39,88	32,01	24,26	18,13	48,73	39,01	29,42	21,93

Disegno tecnico indicativo. Le misure reali potrebbero subire delle variazioni. Indicative technical drawing. Actual measurements may vary.