

ICEBERG

24225B

	Modello	Model	Modèle	Modell	Modelo		ICEBERG 24225B-04 230-1-50HZ	ICEBERG 24225B 400-3-50(T)
	Campo applicazione	Application field	Champé d’application	Anwendungsbereich	Campo d’applicación		-18 ÷ -22	-18 ÷ -22
	Alimentazione	Power supply	Alimentation	Netzanschluß	Alimentación	V/ph/Hz	230/1+N/50	400/3+N/50
	Corrente massima assorbita	Maximum absorbed current	Courant absorbé maximum	Maximal absorbierter Strom	Corriente máxima absorbida	A	18,8	7
	Potenza massima assorbita	Maximum absorbed power	Puissance maximale absorbée	Maximal aufgenommene Leistung	Máxima potencia absorbida	kW	3,7	3,7
	Tipo refrigerante	Refrigerant type	Tipe du gaz	Kältemittel	Tipo refrigerante		R404A/R507/ R452A/R448A/ R449A	R404A/R507/ R452A/R448A/ R449A
	Resa*	Capacity*	Puissance*	Leistung*	Rendimiento*	W	1794	1772
	Pressione sonora a 10 m**	Sound pressure level at 10 m**	Pression acoustique à 10 m**	Schalldruck in 10 m**	Presión sonora a 10 m**	dB(A)	55	55
	Potenza nominale	Power rating	Puissance nominale	Nennleistung	Potencia nominal	CV	2,4	2,4
CMP	Tipo compressore	Compressor type	Type compresseur	Kompressortyp	Tipo compresor		E	E
	Passo alette	Fin spacing	Escart alettes	Lamellenabstand	Paso aletas	mm	2,5	2,5
CND	Ventilatori	Fans	Ventilateurs	Ventilatoren	Ventiladores	ø mm	2 x ø254	2 x ø254
	Potenza nominale assorbita	Nominal power consumption	Puissance nominal absorbée	Nennleistungsaufnahme	Potencia nominal absorbida	W	190	190
	Portata d’aria	Air volume	Débit d’air	Volumenstrom	Caudal aire	m³/h	1400	1400
	Passo alette	Fin spacing	Escart alettes	Lamellenabstand	Paso aletas	mm	8	8
	Sbrinamento	Defrosting	Dégivrage	Abtauung	Desescarche		EL	EL
	Espansione	Expansion	Expansion	Expansion	Expansión		VT	VT
EVP	Ventilatori	Fans	Ventilateurs	Ventilatoren	Ventiladores	ø mm	3 x ø254	3 x ø254
	Potenza nominale assorbita	Nominal power consumption	Puissance nominal absorbée	Nennleistungsaufnahme	Potencia nominal absorbida	W	219	219
	Portata d’aria	Air volume	Débit d’air	Volumenstrom	Caudal aire	m³/h	1950	1950
	Freccia d’aria	Air throw	Projection d’air	Reichweite	Flecha de aire	m	11	11
	Imballo	Packaging	imballo	Imballo	Imballo	X mm	1460	1460
A						Y mm	630	630
						Z mm	901	901
						X mm	-	-
B						Y mm	-	-
						Z mm	-	-
	Peso lordo	Gross weight	Poids brut	Bruttogewicht	Peso bruto	kg	130	130
	Peso netto	Net weight	Poids net	Nettogewicht	Peso neto	kg	106	106
	Volume	Volume	Volume	Volumen	Volúmen	m³	0,83	0,83
	Codice	Code	Code	Kodex	Codigo		999908060	999908010


*Resa:Te= -30°C; Tcond= + 40°C

** Dati derivanti da correlazioni empiriche

- C : Capillare / Capillary / Capillaire / Kapillar / Capilar
- CMP : Compressore / Compressor / Compresseur / Kompressorleistung / Compresor
- CND : Condensatore / Condenser / Condenseur / Verflüssiger / Condensador
- EVP : Evaporatore / Evaporateur / Evaporateur / Verdampfer / Evaporador
- E : Ermetico / Hermetic / Hermetique / Vollhermetisch / Hermético
- G : Gas caldo / Hot gas / Gaz chaud / Heissgas / Gas caliente
- P : Potenza frigorifera / Cooling capacity / Puissances frigorifiques / Kälteleistung / Potencia frigorífica
- S : Semiermetico / Semihermetic / Semi-hermetique / Halbhermetisch / Semihermético
- Ta : Temperatura ambiente / Ambient temperature / Température ambiente / Umgebungstemperatur / Temperatura ambiente
- Tc : Temperatura cella / Cold room temperature / Température chambre froid / Kühlraumtemperatur / Temperatura cámara
- Te : Temperatura evaporazione / evaporation temperature / température d’évaporation / Verdampfungstemperatur / temperatura de evaporación
- Tcond : Temperatura condensazione / condensation temperature / température de condensation / Kondensationstemperatur / temperatura de condensación
- Vol : Volume cella / Coldroom volume / Volume chambre / Kühlzellenvolumen / Volúmen cámara
- VT : Valvola termostatica / Expansion valve / Détendeur thermostatique / Thermostatisches Expansionsventil Válvula termostática

ICEBERG

Versione Professional
Professional version
Professionnel
Beruflich
Profesional

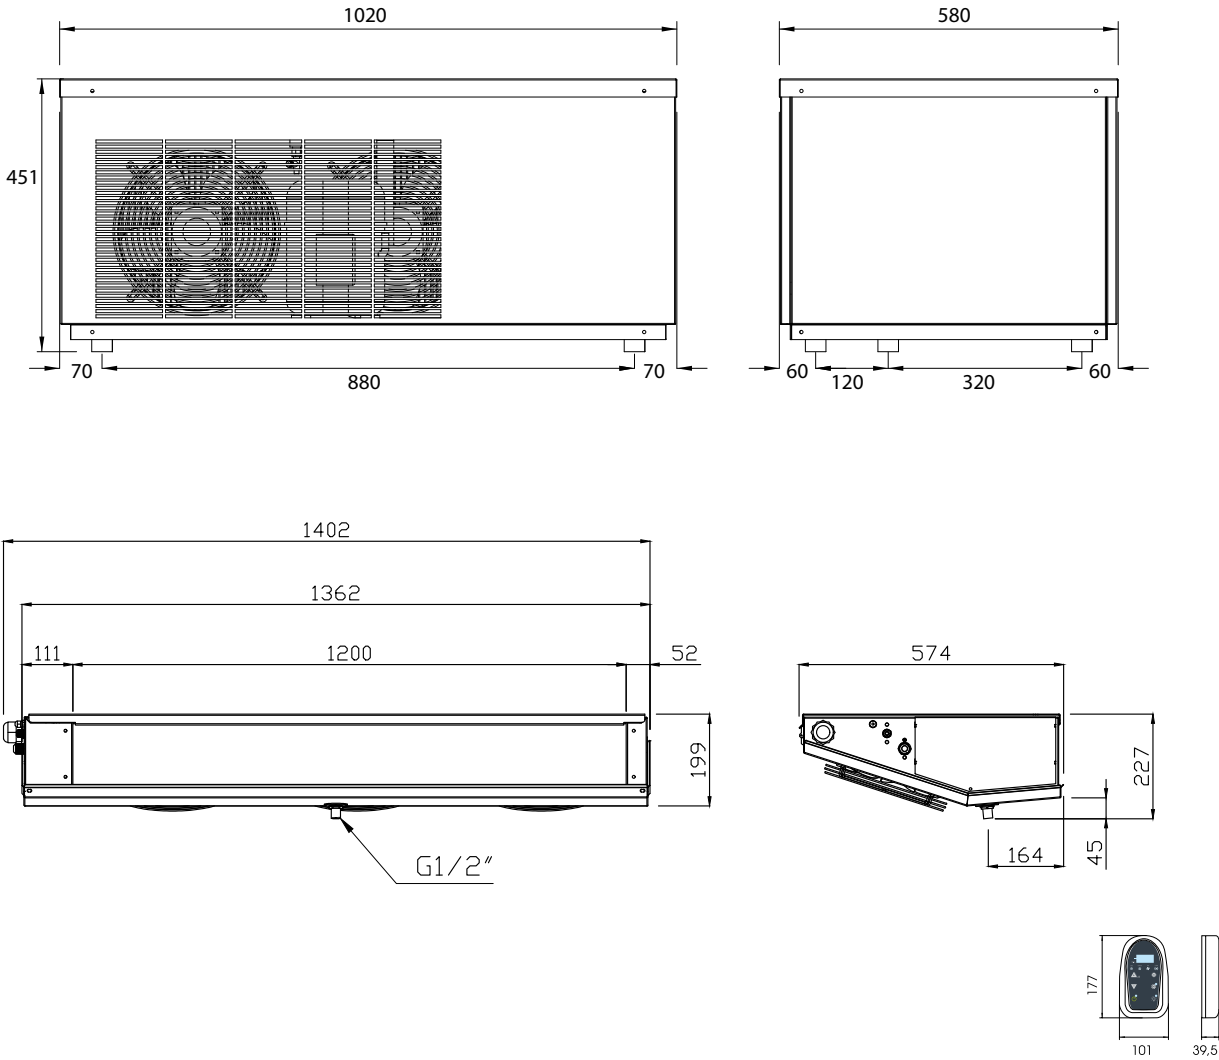

RESA / VOLUME - CAPACITY / VOLUME - PUISSANCE/ VOLUME - LEISTUNG/ VOLUMEN - RENDIMENTO/ VOLUMEN
Volume calculation conditions: pag. 149

24225 B	Tc	°C	-20			
	Ta	°C	27	32	38	43
	P	W	2314	2090	1817	1624
	Vol	m3	39,41	29,08	19,43	13,77

Disegno tecnico indicativo. Le misure reali potrebbero subire delle variazioni. Indicative technical drawing. Actual measurements may vary.