

ICEBERG

50240SN

	Nome	Model	Modèle	Modell	Modelo	ICEBERG 50240SN
	Campo di applicazione	Application field	Champe d'application	Anwendungsbereich	Campo d'aplicación °C	+5 ÷ -2
	Alimentazione	Power supply	Alimentation	Netzanschluß	Alimentación	400/3/60
	Corrente massima assorbita	Max. absorbed current	Courant absorbé max.	Max. absorbierter Strom	Corriente máx. absorbida A	24
	Potenza massima assorbita	Max. absorbed power	Puissance max. absorbée	Max. aufgenom. Leistung	Máx. Potencia absorbida kW	10,66
	Tipo refrigerante	Refrigerant type	Tipe du gaz	Kältemittel	Tipo refrigerante	R404A/R507/ R452A/R448A/ R449A
	Classe PED	PED Category	Catégorie PED	PED-Klasse	Categoría PED	I
	Pressione sonora a 10 m **	Sound pressure level at 10 m **	Pression acoustique à 10 m **	Schalldruck in 10 m **	Presión sonora a 10 m ** dB(A)	55
CMP	Resa *	Capacity *	Puissance *	Leistung *	Rendimiento * W	14932
	Tipo compressore	Compressor type	Type compresseur	Kompressortyp	Tipo compresor	S
CND	Passo alette	Fin spacing	Ecart alettes	Lamellenabstand	Paso aletas mm	2,5
	Ventilatori	Fan	Ventilateur	Ventilator	Ventiladores	2x Ø450 AC
	Pot nominale assorbita	Power rating	Puissance nominale	Nennleistung	Potencia nominal W	980
	Portata aria	Air volume	Debit d' air	Volumenstrom	Caudal aire m3/h	7800
EVP	Passo alette	Fin spacing	Ecart alettes	Lamellenabstand	Paso aletas mm	6
	Sbrinamento	Defrost	Dégivrage	Abtauung	Descongelación	EL
	Espansione	Expansion	Expansion	Expansion	Expansión	VT
	Ventilatori	Fan	Ventilateur	Ventilator	Ventiladores	2x Ø450 AC
	Pot nominale assorbita	Nom. power cons.	Puiss. nom. absorbée	Nennleistungsaufnahme	Pot. Nominal absorbida W	980
	Portata aria	Air volume	Debit d' air	Volumenstrom	Caudal aire m3/h	9800
	Freccia d'aria	Air throw	Projection d'air	Reichweite	Flecha de aire m	25
	Imballo UC X	Packing UC X	Emballage UC X	Verpackung UC X	Embalajes UC X mm	2000
	Imballo UC Y	Packing UC Y	Emballage UC Y	Verpackung UC Y	Embalajes UC Y mm	1140
	Imballo UC Z	Packing UC Z	Emballage UC Z	Verpackung UC Z	Embalajes UC Z mm	1050
	Imballo UE X	Packing UE X	Emballage UE X	Verpackung UE X	Embalajes UE X mm	2160
	Imballo UE Y	Packing UE Y	Emballage UE Y	Verpackung UE Y	Embalajes UE Y mm	995
	Imballo UE Z	Packing UE Z	Emballage UE Z	Verpackung UE Z	Embalajes UE Z mm	995
	Peso lordo	Gross weight	Poids brut	Bruttogewicht	Peso bruto kg	376
	Peso netto	Net Weight	Poids net	Nettogewicht	Peso neto kg	350
	Volume	Volume	Volume	Volumen	Volúmen m3	A2,39 / B2,14
	Codice	Code	Code	Kodex	Codigo	IC_60Hz_11

N= * : Te= -10°C ; Tcond= +40°C
B= * : Te= -30°C / Tcond= +40°C
** Dati derivanti da correlazioni empiriche



C : Capillare / Capillary / Capillaire / Kapillar / Capilar
CMP : Compressore / Compressor / Compresseur / Kompressorleistung / Compresor
CND : Condensatore / Condenser / Condenseur / Verflüssiger / Condensador
EVP : Evaporatore / Evaporator / Evaporateur / Verdampfer / Evaporador
E : Ermetico / Hermetic / Hermetique / Vollhermetisch / Hermético
G : Gas caldo / Hot gas / Gaz chaud / Heissgas / Gas caliente
P : Potenza frigorifera / Cooling capacity / Puissances frigorifiques / Kälteleistung
S : Potencia frigorífica
Ta : Semiermetico / Semihermetic / Semi-hermetique / Halbhermetisch / Semihermético
Tc : Temperatura ambiente / Ambient temperature / Température ambiente

Tc : Umgebungstemperatur / Temperatura ambiente
Te : Temperatura cella / Cold room temperature / Température chambre froid
Te : Kühlraumtemperatur / Temperatura cámara
Te : Temperatura evaporazione / evaporation temperature / température d'évaporation
Tcond : Verdampfungstemperatur / temperatura de evaporación / Kondensationstemperatur / temperatura de condensación / Kondensationstemperatur / temperatura de condensación
Vol : Volume cella / Coldroom volume / Volume chambre / Kühlzellenvolumen / Volúmen cámara
VT : Valvola termostatica / Expansion valve / Détendeur thermostatique / Thermostatisches Expansionsventil / Válvula termostática

ICEBERG



Versione Professional
Professional version
Professionnel
Beruflich
Profesional

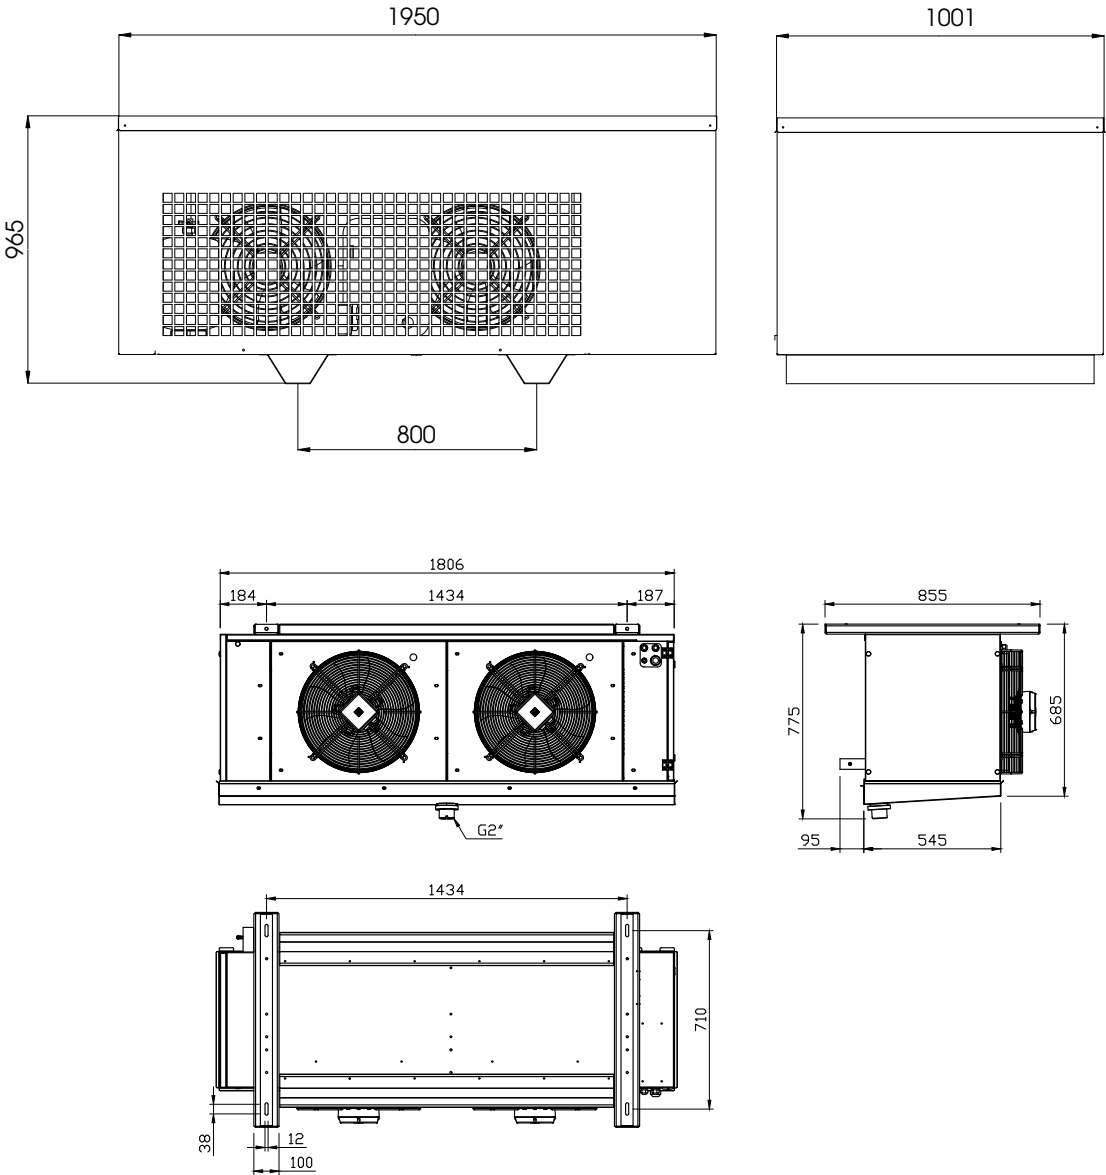

RESA / VOLUME - CAPACITY / VOLUME - PUISSANCE/ VOLUME - LEISTUNG/ VOLUMEN - RENDIMENTO/ VOLUMEN
Volume calculation conditions: pag. 227

ICEBERG 50240SN	Tc	°C	-2				0				5			
	Ta	°C	27	32	38	43	27	32	38	43	27	32	38	43
	Pf	W	14994	13949	12642	11507	15751	14654	13283	12091	17590	16364	14830	13499
	Vol	m3	162,2	144,1	122,1	103,8	188,2	167,0	141,3	120,0	282,9	249,4	209,4	176,6

! Max temperatura ambiente: +43°C / Max ambient temperature: +43°C / Température ambiante maximale: + 43°C / Max Umgebungstemperatur: +43°C / Temperatura ambiente maxima: +43°C

Disegno tecnico indicativo. Le misure reali potrebbero subire delle variazioni. Indicative technical drawing. Actual measurements may vary.