

ICEBERG

18225SB

	Nome	Model	Modèle	Modell	Modelo	ICEBERG 18225SB
	Campo di applicazione	Application field	Champe d'application	Anwendungsbereich	Campo d'aplicación	°C
	Alimentazione	Power supply	Alimentation	Netzanschluß	Alimentación	400/3/60
	Corrente massima assorbita	Max. absorbed current	Courant absorbé max.	Max. absorbierter Strom	Corriente máx. absorbida	A
	Potenza massima assorbita	Max. absorbed power	Puissance max. absorbée	Max. aufgenom. Leistung	Máy. Potencia absorbida	kW
	Tipo refrigerante	Refrigerant type	Tipe du gaz	Kältemittel	Tipo refrigerante	R404A/R507/ R452A/R448A/ R449A
	Classe PED	PED Category	Catégorie PED	PED-Klasse	Categoría PED	Art 4.3
	Pressione sonora a 10 m **	Sound pressure level at 10 m **	Pression acoustique à 10 m **	Schalldruck in 10 m **	Presión sonora a 10 m **	dB(A)
CMP	Resa *	Capacity *	Puissance *	Leistung *	Rendimiento *	W
	Tipo compressore	Compressor type	Type compresseur	Kompressortyp	Tipo compresor	S
CND	Passo alette	Fin spacing	Ecart alettes	Lamellenabstand	Paso aletas	mm
	Ventilatori	Fan	Ventilateur	Ventilator	Ventiladores	2x Ø254 AC
	Pot nominale assorbita	Power rating	Puissance nominale	Nennleistung	Potencia nominal	W
	Portata aria	Air volume	Debit d' air	Volumenstrom	Caudal aire	m3/h
EVP	Passo alette	Fin spacing	Ecart alettes	Lamellenabstand	Paso aletas	mm
	Sbrinamento	Defrost	Dégivrage	Abtauung	Descongelación	EL
	Espansione	Expansion	Expansion	Expansion	Expansión	VT
	Ventilatori	Fan	Ventilateur	Ventilator	Ventiladores	3x Ø254 AC
	Pot nominale assorbita	Nom. power cons.	Puiss. nom. absorbée	Nennleistungsaufnahme	Pot. Nominal absorbida	W
	Portata aria	Air volume	Debit d' air	Volumenstrom	Caudal aire	m3/h
	Freccia d'aria	Air throw	Projection d'air	Reichweite	Flecha de aire	m
	Imballo UC X	Packing UC X	Emballage UC X	Verpackung UC X	Embalajes UC X	mm
	Imballo UC Y	Packing UC Y	Emballage UC Y	Verpackung UC Y	Embalajes UC Y	mm
	Imballo UC Z	Packing UC Z	Emballage UC Z	Verpackung UC Z	Embalajes UC Z	mm
	Imballo UE X	Packing UE X	Emballage UE X	Verpackung UE X	Embalajes UE X	mm
	Imballo UE Y	Packing UE Y	Emballage UE Y	Verpackung UE Y	Embalajes UE Y	mm
	Imballo UE Z	Packing UE Z	Emballage UE Z	Verpackung UE Z	Embalajes UE Z	mm
	Peso lordo	Gross weight	Poids brut	Bruttogewicht	Peso bruto	kg
	Peso netto	Net Weight	Poids net	Nettogewicht	Peso neto	kg
	Volume	Volume	Volume	Volumen	Volúmen	m3
	Codice	Code	Code	Kodex	Codigo	IC_60Hz_12

N= * : Te= -10°C ; Tcond= +40°C
B= * : Te= -30°C / Tcond= +40°C
** Dati derivanti da correlazioni empiriche


C : Capillare / Capillary / Capillaire / Kapillar / Capilar
CMP : Compressore / Compressor / Compresseur / Kompressorleistung / Compresor
CND : Condensatore / Condenser / Condenseur / Verflüssiger / Condensador
EVP : Evaporatore / Evaporator / Evaporateur / Verdampfer / Evaporador
E : Ermetico / Hermetic / Hermetique / Vollhermetisch / Hermético
G : Gas caldo / Hot gas / Gaz chaud / Heissgas / Gas caliente
P : Potenza frigorifera / Cooling capacity / Puissances frigorifiques / Kälteleistung
S : Potencia frigorífica
Ta : Semiermetico / Semihermetic / Semi-hermetique / Halbhermetisch / Semihermético
Tc : Temperatura ambiente / Ambient temperature / Température ambiente

Tc : Umgebungstemperatur / Temperatura ambiente
Te : Temperatura cella / Cold room temperature / Température chambre froid
Te : Kühlraumtemperatur / Temperatura cámara
Te : Temperatura evaporazione / evaporation temperature / température d'évaporation
Tcond : Verdampfungstemperatur / temperatura de evaporación
Tcond : Temperaturdensatione / condensatura de evaporación / température de condensation
Vol : Kondensationstemperatur / temperatura de condensación
Vol : Volume cella / Coldroom volume / Volume chambre / Kühlzellenvolumen / Volúmen cámara
VT : Valvola termostatica / Expansion valve / Détendeur thermostatique
VT : Thermostatisches Expansionsventil / Válvula termostática

ICEBERG



Versione Professional
Professional version
Professionnel
Beruflich
Profesional

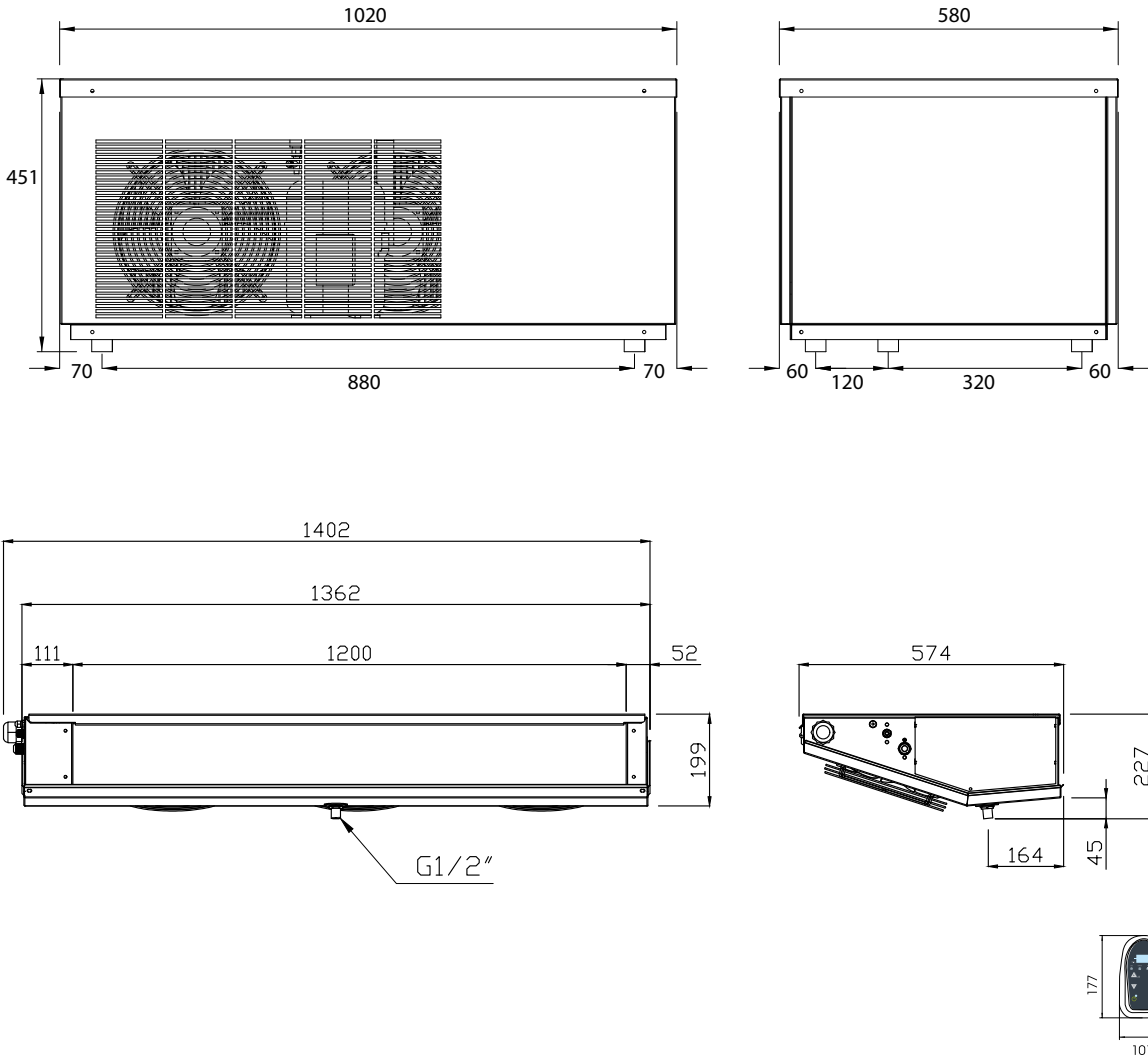

RESA / VOLUME - CAPACITY / VOLUME - PUISSANCE/ VOLUME - LEISTUNG/ VOLUMEN - RENDIMENTO/ VOLUMEN
Volume calculation conditions: pag. 227

ICEBERG 18225SB	Tc	°C	-22				-20				-18			
	Ta	°C	27	32	38	43	27	32	38	43	27	32	38	43
	Pf	W	2304	2098	1835	1602	2471	2250	1967	1717	2633	2396	2093	1825
	Vol	m3	36,0	27,5	18,8	13,0	42,1	32,0	21,8	15,0	48,9	37,0	25,1	17,2

! Max temperatura ambiente: +43°C / Max ambient temperature: +43°C / Température ambiante maximale: + 43°C / Max Umgebungstemperatur: +43°C / Temperatura ambiente maxima: +43°C

Disegno tecnico indicativo. Le misure reali potrebbero subire delle variazioni. Indicative technical drawing. Actual measurements may vary.