

ICEBERG

60

Hz

15225N

	Nome	Model	Modèle	Modell	Modelo	ICEBERG 15225N	ICEBERG 15225N(T)
	Campo di applicazione	Application field	Champe d'application	Anwendungsbereich	Campo d'applicación	°C	
						+5 ÷ -2	+5 ÷ -2
	Alimentazione	Power supply	Alimentation	Netzanschluß	Alimentación		
						230/1/60	400/3/60
	Corrente massima assorbita	Max. absorbed current	Courant absorbé max.	Max. absorbierter Strom	Corriente máx. absorbida	A	
						15,3	7
	Potenza massima assorbita	Max. absorbed power	Puissance max. absorbée	Max. aufgenom. Leistung	Máx. Potencia absorbida	kW	
						3,08	2,4
	Tipo refrigerante	Refrigerant type	Tipe du gaz	Kältemittel	Tipo refrigerante		
						R404A/R507/ R452A/R448A/ R449A	R404A/R507/ R452A/R448A/ R449A
	Classe PED	PED Category	Catégorie PED	PED-Klasse	Categoría PED		
						I	I
	Pressione sonora a 10 m **	Sound pressure level at 10 m **	Pression acoustique à 10 m **	Schalldruck in 10 m **	Presión sonora a 10 m **	dB(A)	
						52	52
CMP	Resa *	Capacity *	Puissance *	Leistung *	Rendimiento *	W	
						3015	3083
	Tipo compressore	Compressor type	Type compresseur	Kompressortyp	Tipo compresor		
						E	E
CND	Passo alette	Fin spacing	Ecart alettes	Lamellenabstand	Paso aletas	mm	
						2,5	2,5
	Ventilatori	Fan	Ventilateur	Ventilator	Ventiladores		
						2x Ø254 AC	2x Ø254 AC
	Pot nominale assorbita	Power rating	Puissance nominale	Nennleistung	Potencia nominal	W	
						190	190
	Portata aria	Air volume	Debit d' air	Volumenstrom	Caudal aire	m3/h	
						1350	1350
EVP	Passo alette	Fin spacing	Ecart alettes	Lamellenabstand	Paso aletas	mm	
						6	6
	Sbrinamento	Defrost	Dégivrage	Abtauung	Descongelación		
						EL	EL
	Espansione	Expansion	Expansion	Expansion	Expansión		
						VT	VT
	Ventilatori	Fan	Ventilateur	Ventilator	Ventiladores		
						3x Ø254 AC	3x Ø254 AC
	Pot nominale assorbita	Nom. power cons.	Puiss. nom. absorbée	Nennleistungsaufnahme	Pot. Nominal absorbida	W	
						219	219
	Portata aria	Air volume	Debit d' air	Volumenstrom	Caudal aire	m3/h	
						1530	1530
	Freccia d'aria	Air throw	Projection d'air	Reichweite	Flecha de aire	m	
						10	10
	Imballo UC X	Packing UC X	Emballage UC X	Verpackung UC X	Embalajes UC X	mm	
						1460	1460
	Imballo UC Y	Packing UC Y	Emballage UC Y	Verpackung UC Y	Embalajes UC Y	mm	
						630	630
	Imballo UC Z	Packing UC Z	Emballage UC Z	Verpackung UC Z	Embalajes UC Z	mm	
						901	901
	Imballo UE X	Packing UE X	Emballage UE X	Verpackung UE X	Embalajes UE X	mm	
						-	-
	Imballo UE Y	Packing UE Y	Emballage UE Y	Verpackung UE Y	Embalajes UE Y	mm	
						-	-
	Imballo UE Z	Packing UE Z	Emballage UE Z	Verpackung UE Z	Embalajes UE Z	mm	
						-	-
	Peso lordo	Gross weight	Poids brut	Bruttogewicht	Peso bruto	kg	
						121	121
	Peso netto	Net Weight	Poids net	Nettogewicht	Peso neto	kg	
						95	95
	Volume	Volume	Volume	Volumen	Volúmen	m3	
						A0,83	A0,83
	Codice	Code	Code	Kodex	Codigo		
						999908079	999908048

N= * :Te= -10°C ; Tcond= +40°C
B= * : Te= -30°C / Tcond= +40°C
** Dati derivanti da correlazioni empiriche


C : Capillare / Capillary / Capillaire / Kapillar / Capilar
CMP : Compressore / Compressor / Compresseur / Kompressorleistung / Compresor
CND : Condensatore / Condenser / Condenseur / Verflüssiger / Condensador
EVP : Evaporatore / Evaporateur / Evaporateur / Verdampfer / Evaporador
E : Ermetico / Hermetic / Hermetique / Vollhermetisch / Hermético
G : Gas caldo / Hot gas / Gaz chaud / Heissgas / Gas caliente
P : Potenza frigorifera / Cooling capacity / Puissances frigorifiques / Kälteleistung
S : Potencia frigorífica
S : Semiermetico / Semihermetic / Semi-hermetique / Halbhermetisch / Semihermético
Ta : Temperatura ambiente / Ambient temperature / Température ambiente

Tc : Umgebungstemperatur / Temperatura ambiente
Tc : Temperatura cella / Cold room temperature / Température chambre froid
Te : Kühlraumtemperatur / Temperatura cámara
Te : Temperatura evaporazione / evaporation temperature / température d'évaporation
Te : Verdampfungstemperatur / temperatura de evaporación
Tcond : Temperaturdensatione / condensation temperature / température de condensation
Tcond : Kondensationstemperatur / temperatura de condensación
Vol : Volume cella / Coldroom volume / Volume chambre / Kühlzellenvolumen / Volúmen cámara
VT : Valvola termostatica / Expansion valve / Détendeur thermostatique
VT : Thermostatisches Expansionsventil / Válvula termostática

ICEBERG



Versione Professional
Professional version
Professionnel
Beruflich
Profesional

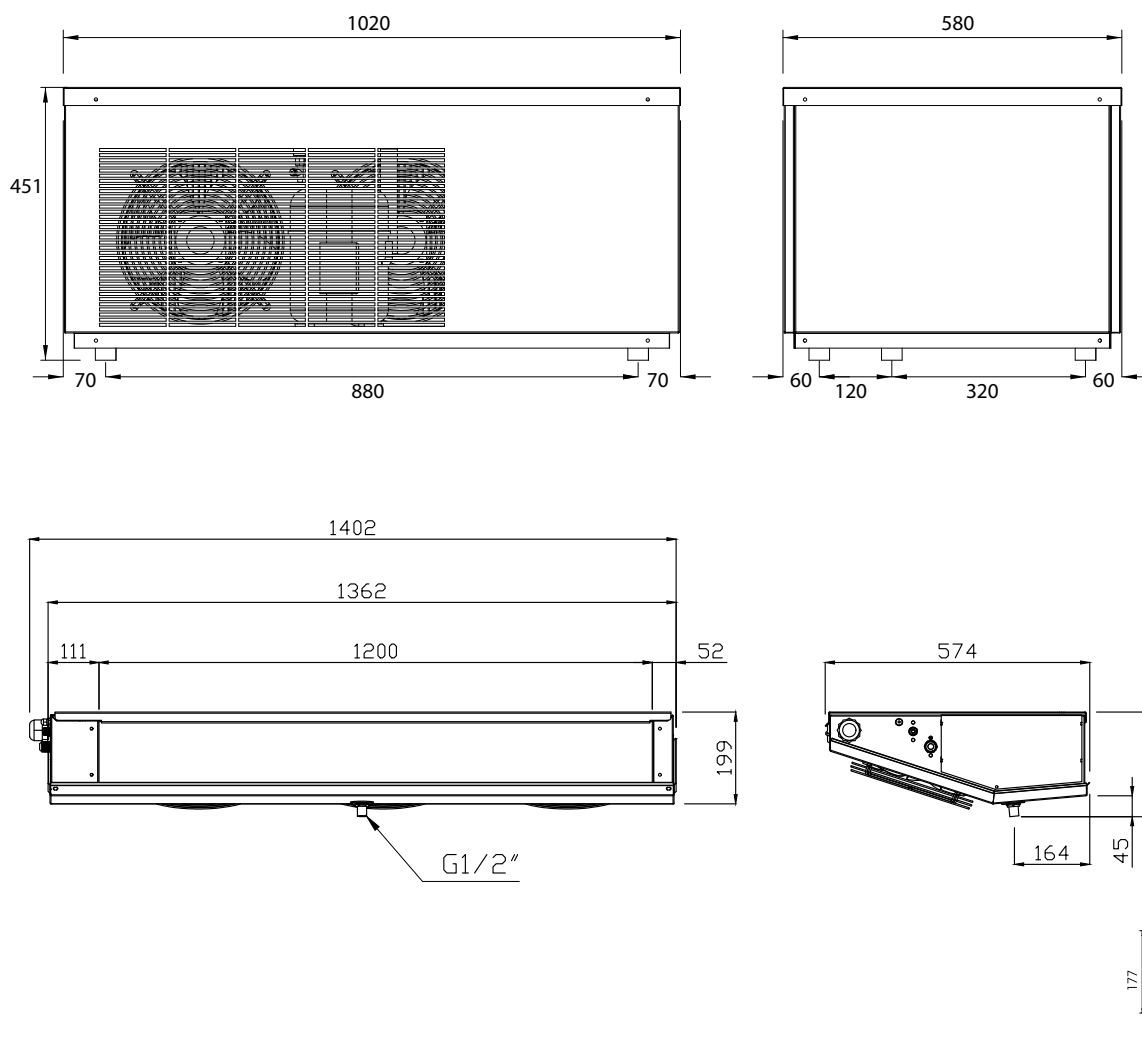

RESA / VOLUME - CAPACITY / VOLUME - PUISSANCE/ VOLUME - LEISTUNG/ VOLUMEN - RENDIMIENTO/ VOLUMEN
Volume calculation conditions: pag. 227

ICEBERG 15225N	Tc	°C	-2				0				5			
	Ta	°C	27	32	38	43	27	32	38	43	27	32	38	43
	Pf	W	2865	2672	2430	2217	3025	2823	2568	2344	3414	3187	2902	2652
	Vol	m3	26,0	22,2	17,8	14,2	30,6	26,1	20,8	16,6	47,3	40,0	31,6	25,0

ICEBERG 15225N(T)	Tc	°C	-2				0				5			
	Ta	°C	27	32	38	43	27	32	38	43	27	32	38	43
	Pf	W	2898	2699	2448	2229	3057	2848	2586	2357	3443	3211	2919	2665
	Vol	m3	26,4	22,5	17,9	14,3	31,0	26,4	21,0	16,7	47,7	40,4	31,8	25,2

Max temperatura ambiente: +43°C / Max ambient temperature: +43°C / Température ambiante maximale: + 43°C / Max Umgebungstemperatur: +43°C / Temperatura ambiente maxima: +43°C