

ICEBERG



50235BW

	Modello	Model	Modèle	Modell	Modelo	ICEBERG 50235 S B W
	Campo applicazione	Application field	Champe d'application	Anwendungsbereich	Campo d'aplicación	°C
						-18 ÷ -22
	Alimentazione	Power supply	Alimentation	Netzanschluß	Alimentación	V/ph/Hz
						400/3+N/50
	Corrente massima assorbita	Maximum absorbed current	Courant absorbé maximum	Maximal absorbierter Strom	Corriente máxima absorbida	A
						16,2
	Potenza massima assorbita	Maximum absorbed power	Puissance maximale absorbée	Maximal aufgenommene Leistung	Máxima potencia absorbida	kW
						8,5
	Tipo refrigerante	Refrigerant type	Tipe du gaz	Kältemittel	Tipo refrigerante	R404A/R507/R452A/R448A/R449A
	Classe PED	PED Category	Catégorie PED	PED-Klasse	Categoría PED	0
	Resa*	Capacity*	Puissance*	Leistung*	Rendimiento*	W
						-
CMP	Tipo compressore	Compressor type	Type compresseur	Kompressortyp	Tipo compresor	S
	Tipo condensatore	Condenser type	Type de condenseur	Kondensartyp	Tipo de condensador	Saldobrasato
CND	Max temperatura ingresso acqua	Max water inlet temperature	Température maximale d'entrée d'eau	Maximale Wassereintrittstemperatur	Temperatura máxima de entrada de agua	°C
						20
	Potenza nominale di condensazione*	Condensing power rating	Puissance de condensation	Verflüssigungsleistung	Potencia nominal de condensación	W
						0
	Passo alette	Fin spacing	Escart alettes	Lamellenabstand	Paso aletas	mm
						8
	Sbrinamento	Defrosting	Dégivrage	Abtauung	Desescarche	EL
	Espansione	Expansion	Expansion	Expansion	Expansión	VT
EVP	Ventilatori	Fans	Ventilateurs	Ventilatoren	Ventiladores	ø mm
						3 x ø315
	Potenza nominale assorbita	Nominal power consumption	Puissance nominal absorbée	Nennleistungsaufnahme	Potencia nominal absorbida	W
						285
	Portata d'aria	Air volume	Débit d'air	Volumenstrom	Caudal aire	m³/h
						4900
	Freccia d'aria	Air throw	Projection d'air	Reichweite	Flecha de aire	m
						18
	Imballo	Packaging	imballo	Imballo	Imballo	mm X
						1300
A						mm Y
						830
						mm Z
						800
						mm X
						-
B						mm Y
						-
						mm Z
						-
	Peso lordo	Gross weight	Poids brut	Bruttogewicht	Peso bruto	kg
						-
	Peso netto	Net weight	Poids net	Nettogewicht	Peso neto	kg
						-
	Volume	Volume	Volume	Volumen	Volúmen	m³
						A:0.86 / B:-
	Codice	Code	Code	Kodex	Codigo	iceberg_H2o_06


*Resa:Te= -30°C; Tcond= +40°C

- C : Capillare / Capillary / Capillaire / Kapillar / Capilar
- CMP : Compressore / Compressor / Compresseur / Kompressorleistung / Compresor
- CND : Condensatore / Condenser / Condenseur / Verflüssiger / Condensador
- EVP : Evaporatore / Evaporateur / Evaporateur / Verdampfer / Evaporador
- E : Ermetico / Hermetic / Hermetique / Vollhermetisch / Hermético
- G : Gas caldo / Hot gas / Gaz chaud / Heissgas / Gas caliente
- P : Potenza frigorifera / Cooling capacity / Puissances frigorifiques / Kälteleistung / Potencia frigorífica
- S : Semiermetico / Semihermetic / Semi-hermetique / Halbhermetisch / Semihermético
- Ta : Temperatura ambiente / Ambient temperature / Température ambiante / Umgebungstemperatur / Temperatura ambiente
- Tc : Temperatura cella / Cold room temperature / Température chambre froid / Kühlraumtemperatur / Temperatura cámara
- Te : Temperatura evaporazione / evaporation temperature / température d'évaporation / Verdampfungstemperatur / temperatura de evaporación
- Tcond : Temperatura condensazione / condensation temperature / température de condensation / Kondensationstemperatur / temperatura de condensación
- Vol : Volume cella / Coldroom volume / Volume chambre / Kühlzellenvolumen / Volúmen cámara
- VT : Valvola termostatica / Expansion valve / Détendeur thermostatique / Thermostatisches Expansionsventil Válvula termostática

ICEBERG



Versione Professional
Professional version
Professionnel
Beruflich
Profesional

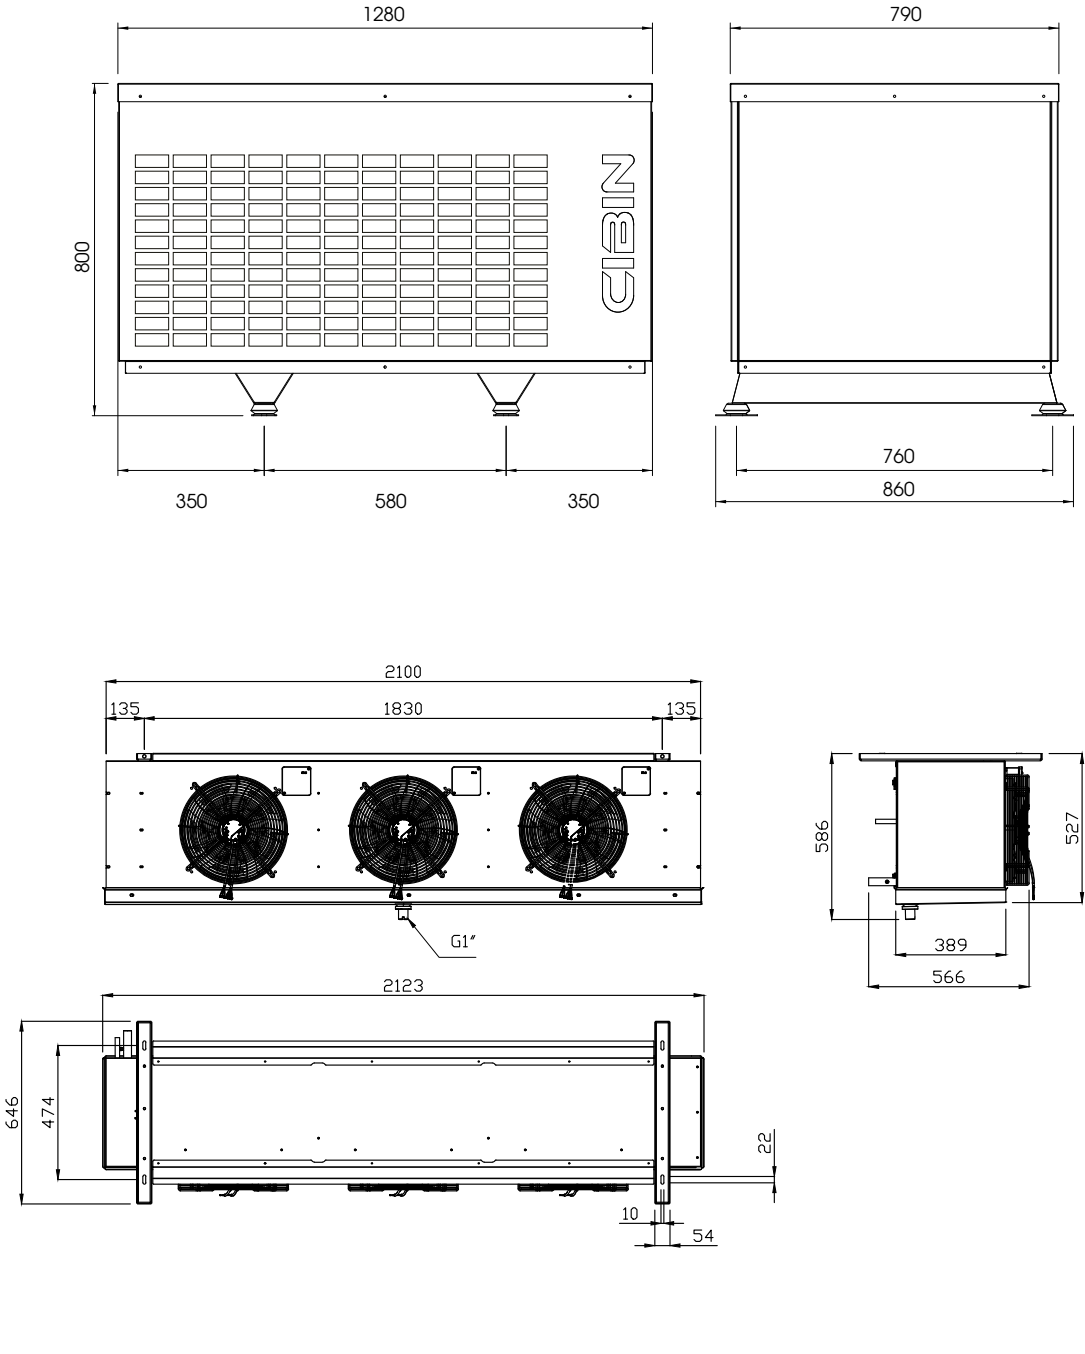

Disegno tecnico indicativo. Le misure reali potrebbero subire delle variazioni. Indicative technical drawing. Actual measurements may vary.