

ICEBERG



12125BW

17125BW

	Modello	Model	Modèle	Modell	Modelo	ICEBERG 12125B-W-04 230-1-50+N+PE PIAST.		ICEBERG 17125B-W-04 230-1-50+N+PE PIAST.
	Campo applicazione	Application field	Champe d'application	Anwendungsbereich	Campo d'aplicación	°C	-18 ÷ -22	-18 ÷ -22
	Alimentazione	Power supply	Alimentation	Netzanschluß	Alimentación	V/ph/ Hz	230/1+N/50	230/1+N/50
	Corrente massima assorbita	Maximum absorbed current	Courant absorbé maximum	Maximal absorbierter Strom	Corriente máxima absorbida	A	6,9	9,1
	Potenza massima assorbita	Maximum absorbed power	Puissance maximale absorbée	Maximal aufgenommene Leistung	Máxima potencia absorbida	kW	1,4	1,8
	Tipo refrigerante	Refrigerant type	Tipe du gaz	Kältemittel	Tipo refrigerante		R404A/R507/ R452A/R448A/ R449A	R404A/R507/ R452A/R448A/ R449A
	Classe PED	PED Category	Catégorie PED	PED-Klasse	Categoría PED		0	0
	Resa*	Capacity*	Puissance*	Leistung*	Rendimiento*	W	-	-
CMP	Tipo compressore	Compressor type	Type compresseur	Kompressortyp	Tipo compresor		E	E
CND	Tipo condensatore	Condenser type	Type de condenseur	Kondensatortyp	Tipo de condensador		Saldobrasato	Saldobrasato
	Max temperatura ingresso acqua	Max water inlet temperature	Température maximale d'entrée d'eau	Max Wassereintrittstem- peratur	Temperatura máxima de entrada de agua	°C	20	20
	Potenza nominale di condensazione*	Condensing power rating	Puissance de conden- sation	Verflüssigungsleistung	Potencia nominal de condensación	W	0	0
EVP	Passo alette	Fin spacing	Escart alettes	Lamellenabstand	Paso aletas	mm	8	8
	Sbrinamento	Defrosting	Dégivrage	Abtauung	Desescarche		EL	EL
	Espansione	Expansion	Expansion	Expansion	Expansión		VT	VT
	Ventilatori	Fans	Ventilateurs	Ventilatoren	Ventiladores	ø mm	2 x ø254	2 x ø254
	Potenza nominale assorbita	Nominal power consumption	Puissance nominal absorbée	Nennleistungsaufnahme	Potencia nominal absorbida	W	0	146
A	Portata d'aria	Air volume	Débit d'air	Volumenstrom	Caudal aire	m³/h	1300	1300
	Freccia d'aria	Air throw	Projection d'air	Reichweite	Flecha de aire	m	9	9
	Imballo	Packaging	imballo	Imballo	Imballo	mm X	1250	1250
						mm Y	600	600
						mm Z	865	865
B						mm X	-	-
						mm Y	-	-
						mm Z	-	-
	Peso lordo	Gross weight	Poids brut	Bruttogewicht	Peso bruto	kg	0	92
	Peso netto	Net weight	Poids net	Nettogewicht	Peso neto	kg	0	73
	Volume	Volume	Volume	Volumen	Volúmen	m³	0,65	0,65
	Codice	Code	Code	Kodex	Codigo		999908234	999908237


*Resa:Te= -30°C; Tcond= + 40°C

- C : Capillare / Capillary / Capillaire / Kapillar / Capilar
- CMP : Compressore / Compressor / Compresseur / Kompressorleistung / Compresor
- CND : Condensatore / Condenser / Condenseur / Verflüssiger / Condensador
- EVP : Evaporatore / Evaporateur / Evaporateur / Verdampfer / Evaporador
- E : Ermetico / Hermetic / Hermetique / Vollhermetisch / Hermético
- G : Gas caldo / Hot gas / Gaz chaud / Heissgas / Gas caliente
- P : Potenza frigorifera / Cooling capacity / Puissances frigorifiques / Kälteleistung / Potencia frigorífica
- S : Semiermetico / Semihermetic / Semi-hermetique / Halbhermetisch / Semihermético
- Ta : Temperatura ambiente / Ambient temperature / Température ambiente / Umgebungstemperatur / Temperatura ambiente
- Tc : Temperatura cella / Cold room temperature / Température chambre froid / Kühlraumtemperatur / Temperatura cámara
- Te : Temperatura evaporazione / evaporation temperature / température d'évaporation / Verdampfungstemperatur / temperatura de evaporación
- Tcond : Temperatura condensazione / condensation temperature / température de condensation / Kondensationstemperatur / temperatura de condensación
- Vol : Volume cella / Coldroom volume / Volume chambre / Kühlzellenvolumen / Volúmen cámara
- VT : Valvola termostatica / Expansion valve / Détendeur thermostatique / Thermostatisches Expansionsventil Válvula termostática

ICEBERG



Versione Professional
Professional version
Professionnel
Beruflich
Profesional

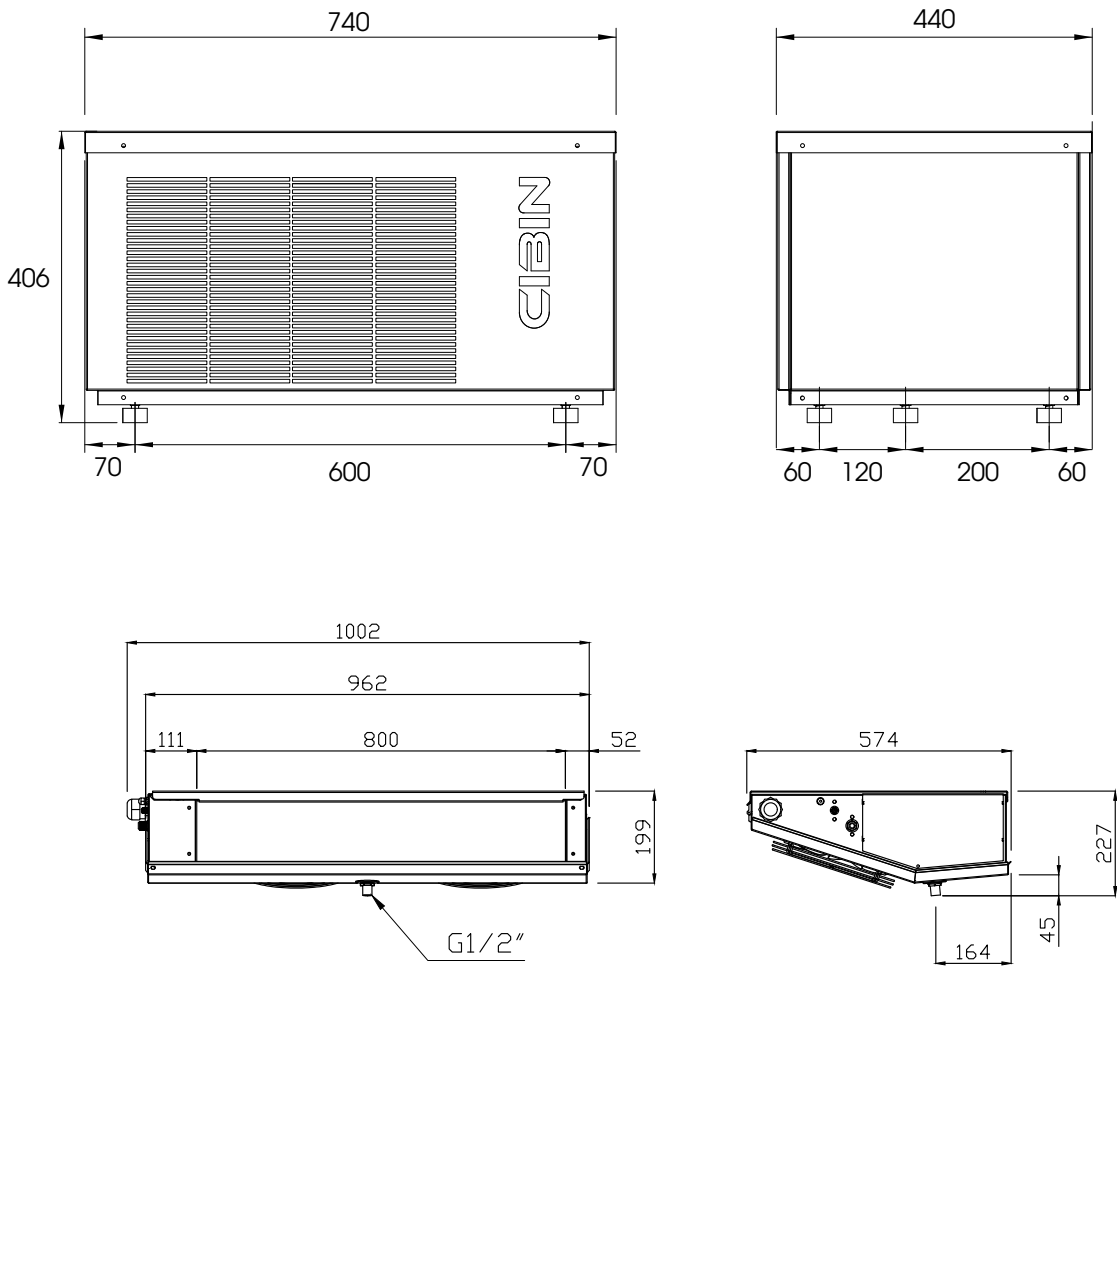

Disegno tecnico indicativo. Le misure reali potrebbero subire delle variazioni. Indicative technical drawing. Actual measurements may vary.